

JUNE 22, 1959

MARINE AND TERRIER MISSILE




missiles and rockets

MAGAZINE OF WORLD ASTRONAUTICS

Support Catalogue—How Big? 13
ing Notch Sensitivity 15
's Satellite Drag Brake 18


AN AMERICAN AVIATION PUBLICATION

TYPE 9234-4550 2POT, 2AMP, MAGNETIC LATCH RELAY




(BRACKET MOUNTING, SOLOER HOOK TERMINALS, HERMETICALLY SEALED)

TYPE 9200-5091 2POT, 2AMP, RELAY



(STUD MOUNTING, SOLDER HOOK TERMINALS, HERMETICALLY SEALED)

TYPE 9200-5072 2PDT, 2AMP, RELAY



(PLUG IN OR PRINTED CIRCUIT MOUNTING, HERMETICALLY SEALED)

LEACH SUBMINIATURE CRYSTAL CAN RELAYS

(SHOWN ABOVE...ACTUAL SIZE)

**torture-tested
to perfection
for big
relay performance**

These sensitive Leach subminiature relays deliver big relay performance... in a crystal can size that makes them ideal for use in missile control circuits in airborne or ground equipment and in computer and printed circuits.

Torture-tested to perfection in the Leach Production Reliability Center, these subminiatures are designed to meet the critical extremes of vibration, shock and other stringent environmental requirements in military and commercial applications.

They meet the specifications of both MIL-R-25018 and MIL-R-5757C—as well as MIL-R-6106C, including the minimum current test requirements.

Uniform contact pressure and overtravel are guaranteed for the life of these balanced-armature relays. They are available in a wide range of socket, stud and bracket mountings to meet specific customer requirements.

Write today for *Leach Crystal Can Relay Brochure* containing specifications, typical ratings and other information on these subminiatures! Or contact your nearest Leach sales representative to discuss your specific subminiature relay requirements.



LOOK TO LEACH

RELAY DIVISION...LEACH CORPORATION

5915 AVALON BOULEVARD, LOS ANGELES 3



The Mission is Simulated—the Experience is Real!

In the complex, split-second action of modern all-weather and night missions, the experience and trained reflexes of a pilot spell success or failure. And today, the only practical, economical way to build such experience is with electronic flight and weapons system simulators that create and re-create every situation of an actual mission itself.

At Curtiss-Wright, the art of simulation has reached far beyond representing the aircraft alone. Curtiss-Wright builds equipment for simulation of all-weather operations, complete tactical missions, and entire weapons systems, for the most advanced fighters, bombers and heavy bombers, as evidenced by simulators built for the U.S. Navy's F4H1 and A4D, and the B58 for the U.S. Air Force.

Tactical simulators include such sophisticated functions as simulation of radar fire control systems, search and bombing radar systems, electronic countermeasures simulation, and action of the airborne armament missiles themselves.

With these skills and capabilities, Curtiss-Wright is prepared to design and produce complete training equipment for a single aircraft or entire weapons systems — providing the priceless experience that only this modern training equipment makes possible.


ELECTRONICS DIVISION
CURTISS-WRIGHT 
 CORPORATION • CARLSTADT, N. J.

BUILD ON...

Eastern

TEMPERATURE CONTROL EXPERIENCE:

AVIONIC COOLING



Eastern cooling packs for electronic subsystems extend operating ranges to altitudes where air cooling becomes ineffective. 'Black box' designs can be more compact—reliable even at five times the speed of sound.

These liquid cooling systems are completely self-contained—provide such components as pumps, heat exchangers, air impellers, reservoir, coolant flow and temperature interlocks and similar parts.

Cooling capacities of existing systems range from 1,000 to 22,000 watts dissipation rates. Eastern cooling packs take ambient temperatures from -55°C to $+55^{\circ}\text{C}$ in stride, and perform to altitudes of 60,000 ft.

Extensive experience in missile applications has enabled Eastern to develop systems unusually compact and light as well as highly reliable. At the same time, Eastern is able to provide at minimum cost equipment engineered to a specific need by using missile-proved components designed to your system configuration.

Turn to Eastern for space-, weight-, and cost-saving solutions to your hottest cooling problem. Write for New BULLETIN 360.

liquid cooling units for 50 to 50,000 watts dissipation

PIONEERS OF THE THERMAL FRONTIER

EASTERN INDUSTRIES INCORPORATED
100 SKIFF STREET
HAMDEN 14, CONN.



Executive EditorCLARKE NEWELL
Managing EditorDONALD E. PETERSON

EDITORIAL STAFF

News EditorREED BUTLER
Military & DefenseBETTY OSV
JAMES I.
Electronics/Support EquipmentHAL GETT
Electronics EngineeringCHARLES D. LAF
Missile ManufacturingWILLIAM E. HOV
Missile BusinessERICA M. I
NASAPAUL MI
Los AngelesFRED HUT
RICHARD VAN O
FRANK MCG

LondonG. V. E. THOM
ParisJEAN-MARIE R
GenevaANTHONY VAN
Art DirectorWILLIAM MA
Ass't Art DirectorBACIL GU

CONTRIBUTORS

Propulsion EngineeringMICHAEL LOR
IndustryJAMES J. HAGERTY
Soviet AffairsDR. ALBERT P
Space MedicineDR. HUBERTUS STRUG
AstrophysicsDR. I. M. L
ResearchHEYWARD CANNEY

ADVISORY BOARD

DR. WERNER VON BRAUN ROBERT P. HAVI
DR. PETER CASTRUCCIO DR. ARTHUR KANTRO
KRAFFT EHRLICHE DR. EUGEN SA
R. F. GOMPERTZ ALEXANDER S

BUSINESS STAFF

Assistant PublisherE. D. MUH
Advertising Sales ManagerW. E. B
Circulation DirectorL. L. BRE
Promotion ManagerJ. E. MC
Advtg. Service ManagerMRS. GLADYS BU
Production ManagerJ. F. W
Ass't Production Mgr.ELSIE
New York17 East 48 E
Eastern Advtg. Mgr.P. B. KI
A. B. SCH

Detroit201 Stephenson
K. J. V
Chicago139 N. Clar
G. E. Y
Los Angeles8929 Wilshire
J. W. MA
C. R. MART
Miami208 Almeria A
R. D. H
Toronto12 Richmond
ALLIN ASSO
London28 Brute
NORALL &
Paris11 Rue Con
Geneva10 Rue G

Missiles and Rockets Volume 5 Number

Published each Monday by American Av
Publications, Inc., 1001 Vermont Ave.,
Washington 5, D.C.

WAYNE W. PARRISHPresident & Pub
LEONARD A. EISENERExecutive Vice Pre
& General M

A. H. STACKPOLEVice Pre
FRED HUNTERVice Pre
ERIC BRAMLEYVice Pre
ROBERT R. PARRISHVice Pre

Printed at the Telegraph Press, Harrisbur
Second class postage paid at Washington
and at additional mailing offices. Cop
1959, American Aviation Publications, Inc.

Subscription rates: U.S., Canada and P
Union Nations—1 year, \$8.00; 2 years, \$1
3 years, \$14.00. Foreign—1 year, \$10.0
years, \$18.00; 3 years, \$26.00. Single
rate—\$7.50. Subscriptions are solicited
from persons with identifiable comm
or professional interests in missiles
rockets. Subscription orders and chang
address should be referred to Circul
Fulfillment Mgr., M/R, 1001 Vermont
Washington 5, D.C. Please allow 4 w
for change to become effective and en
recent address label if possible.



missiles and rockets, June 22,

JUNE 22 HEADLINES

Avco Proposes Drag Brake for Manned Satellite
Company says ICBM research and aero-medical development
has made possible designs with advantages of simplicity, less expense and lightweight 18

Lab Duplicates Re-entry Heat and Temperature
Everett, Mass., facility uses 10-megawatt high-pressure arc plasma
generator developed for ICBM nose cone tests 22

NASA Space Lab Plans Outlined at ARS Meeting
Gathering also hears debate on merits on Project Mercury
"holding facility" and reports on ion engine, ramjets and APU
developments 24

ASTRONAUTICS ENGINEERING

Notch Sensitivity Barrier Can Be Crossed
Large diameter rocket motor cases with 300,000 psi min-yield
strength may be in production within a year through promising
metallurgical techniques 15

MISSILE SUPPORT

How Long A List of AF Support Items?
Viewpoints differ on a desirable size for Technical Information
File which could run to 100,000 items but will be considerably
smaller at least in the beginning 13

MISSILE ELECTRONICS

The Promise of Thermoelectric Power
With 837 companies searching for materials and methods, a few
years might see development of a generator to power an inter-
space plasma propulsion engine 29

Anti-Multipath Equipment (AME) Unveiled
Page Communications' gear tested in North Atlantic is expected
to find more use on ionoscatter circuits and offers potential for
increased channel capacity 33

THE MISSILE WEEK

Washington Countdown 9
Industry Countdown 11
More About the Missile Week 39

DEPARTMENTS


Editorial 7
Moscow Briefs 40
Missile Business 42
Reviews 44
Propulsion Engineering 45
People 47
Contract Awards 48
When and Where 50




COVER: Leatherneck is backed by Convair's Terrier, used for ground support as well as at sea.



EXAMPLE of brittle failure in hydrotest of solid rocket motor case (see p. 15).



MODEL of satellite drag brake proposed by Avco as alternative to retro-rockets (see p. 18).



RE-ENTRY heat and temperatures are duplicated at Avco's Everett, Mass., Laboratory (see p. 22).




SNAP III generator offers hope that small electrical sources can live long in space (see p. 29).

COMMUNICATIONS...

Radio Set AN/ARC-57 . . . designed and developed by *The Magnavox Company*, in conjunction with the Air Force, is an essential UHF communications system, providing the utmost in performance and reliability for the CONVAIR B-58.

It clearly demonstrates *The Magnavox Company's* ability to produce and work as a prime contractor on a complex weapons system.


MAGNAVOX capabilities are in The Fields Of Airborne Radar, ASW, Communications, Navigation Equipments, Fusing and Data Handling . . . your inquiries are invited.



PRODUCTS
THAT SPEAK FOR
THEMSELVES

Magnavox

MAKES THE B-58 TALK!

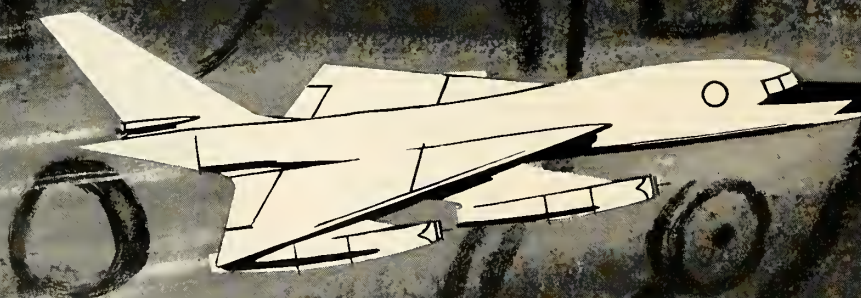

COMMUNICATIONS



RADAR



DATA HANDLING



ASW



MISSILES

THE MAGNAVOX CO. • DEPT. 82 • Government and Industrial Division • FORT WAYNE, IN

Wake Up and Live

These are troubled days for the aerospace industry, once known as the aircraft industry. Individually and collectively its member companies are taking a beating on Capitol Hill, in the Pentagon and in their once-excellent public relations to the point where they are now being alluded to by the President as a munitions lobby.

And it is largely their own fault.

They have only recently witnessed the embarrassing sight of one of the most powerful men in Congress, Chairman Carl Vinson of the House Armed Services Committee, mercilessly chastising the industry in a relentless attack on their renegotiation position.

The military leaders, once staunch allies, have not rallied to the industry's support. The daily press has played the news straight from government releases and the result has not been kind.

The truth is that the aerospace/aircraft industry is no longer the protected darling of the gods in Washington and it is time that its members faced up to this fact.

The days when an aircraft company president—if he didn't like the way things were going for his company—called up the chief of staff and set matters right, are gone forever. So are the days when the aerospace/aircraft industry didn't have to fight its battle on the Hill because the military fought it for them.

The aerospace industry is the biggest manufacturing industry in the world (753,500 employees against 741,900 for automobile at last count) and its members must learn that it's a tough world with very tough competition for the breaks. Most other major segments of U.S. industry faced up to it a long time ago.

The aerospace industry will probably not always remain largest as an employer, because the articles it makes tend to become more expensive in cost and fewer in numbers. (What effect this will have on the national economy is worth thinking about.) But most certainly in the foreseeable future it will rank among the most important, both in dollars and national security.

From a position not quite so close to the forest, we would like to suggest to the industry that it consider certain actions:

Take active steps to avoid being classified as a chosen, favored, captive or kept industry. The once-accepted fact that the country had to maintain a base for mobilization is a lot less true in these days

of instantaneous warfare. Companies stay alive these days only on their competitive skill, diversification, ingenuity and courage.

Agree on a legislative program and unite behind it. Congressional battles can be won on the home front a lot easier than in Washington. Renegotiation appears to be a lost cause for the moment. Indemnification for unusual risks is bottled up in Congress and probably won't emerge at this session. Revision of the NASA patent inequities will come only when Congress is convinced they are really inequitable. Look to Washington for guidance and cohesion, but don't leave it all up to the people there.

Forget the fact that relationships with the Pentagon were once a matter of personal friendships forged in the canvas-winged biplanes of World War I combat or in the barnstorming days of the Twenties. There's a new crop of men making the decisions these days in the Pentagon and at Wright Field, Huntsville, BuAer and BMD. And a new crop flying your planes and guiding your missiles. Most of them don't know the company presidents and don't expect to. But these are the men who have to know your product and believe in it, because they are the ones who, in the long run, really dictate the purchase and use of it.

As for Congress, getting industry's story over to them is a matter of proper communication. And in this field, whether it involves Congress, the military or the public, perhaps the most important requirement visibly lacking is a strong central policy or philosophy. What is the industry's philosophy on the team concept, especially, if two or more major primes must join on a contract to achieve the best possible product? What is the industry's position on government versus private ownership of facilities? What has the aerospace industry done about explaining the financial and economic facts of life to its biggest customer—the military, especially the younger generation of military officers? Has a real effort been made to inform Congress of industry's position on the negotiated versus the advertised contract and the reasons therefore? Or that negotiated contracts are really based on competitive bids, with the losers forfeiting time, work and tremendous sums by competing?

Right now, many of the decisions themselves are no more important, it seems to us, than the fact that the industry must unite on them. And match its philosophy with the needs of a changing world.

Clarke Newlon

HOW SAC'S "HOUND DOG" SCENTS ITS TARGET



The crew of the B-52G starts up the jet engine of the sharp-nosed GAM-77 Hound Dog missile hung under its wing...gives its inertial autonavigator the location of the target.

On a "for-real" mission, the Hound Dog would leap toward its target at supersonic speed—very likely a ground-defense center hundreds of miles away. Its guidance system can't be jammed...can't be decoyed.

Purpose of the GAM-77 air-to-ground jet-powered guided missile is to increase the striking power of Boeing's B-52. Sling a pair of Hound Dogs under the wings of the new B-52G—and you have what amounts to a brand-new weapon system.

The GAM-77 program was started in August, 1957. The missile has been put into accelerated development. It already is in its early flight test phase...will be deployed by 1960.

Weapon system contractor: the Missile Division of North American Aviation.

MISSILE DIVISION



NORTH AMERICAN AVIATION, INC., DOWNEY, CALIFORNIA

washington countdown

The Navy has decided to go along with development of a medium range ALBM—probably with a *Polaris* second-stage configuration.

Leading frame manufacturers are being asked or will be asked to submit proposals. Already under consideration are **Martin's Bold Orion** (M/R Dec. 1, 1958) and **Lockheed-Convair** and **McDonnell** proposals submitted to AF during ALBM competition won by **Douglas**.

Insiders are speculating on whether the Office of Secretary of Defense will allow two almost parallel programs.

The **Douglas** ALBM will have a range of from 1000 to 1500 miles. The 750-mile range Navy ALBM would be launched from carrier-based-jets—possibly the Mach 2 Vigilante A3J under development by North American.

IN THE PENTAGON

The long-range significance . . .

of the compromise "master plan" for U.S. air defense is that the advocates of the offense have won a victory. They have contended that the Soviet bomber threat is on the decline and the ICBM threat is rapidly mounting. Therefore, they argue that every available dollar must be spent on the one defense-in-being against the ICBM—the offensive power of SAC.

Both the Western Electric . . .

Nike-Hercules and the **Boeing Bomarc** suffered with greater acceptance of offense advocates' viewpoint. But *Nike-Hercules* suffered less because it is already here. *Bomarc-B* is about two years away. Therefore, it took the bigger slashing.

The Pentagon sought . . .

to sweeten the "master plan" with the extra \$137 million for *Nike-Zeus*. And more sweetener may be on the way in the form of Pentagon agreement to spend extra millions on ICBM's—specifically the **Convair Atlas** and the **Boeing Minuteman**. But the mood of Congress is still sour. The end of the battle is nowhere in sight.

The next shot . . .

in ARPA's *Discoverer* series is expected this week—the second shot this month. The *Discoverer IV* will not carry animals in its

biomedical capsule. But an attempt is expected to be made to recover the capsule from orbit.

Australian observers believe . . .

the Woomera range may soon become second only to Cape Canaveral in the firing of satellites and rockets. Already, British, American and Australian scientists are gathering in Salisbury, near Adelaide, South Australia, for more *Black Knight* tests and what may be Britain's first satellite launching attempt within several months.

ON CAPITOL HILL

The big congressional furor . . .

over the so-called "munitions lobby" is expected to grow warmer with the summer. But whether it will stay warm enough to be served up during the 1960 presidential campaign will depend on the forthcoming House investigation into the hiring of retired military officers by defense contractors.

Meantime, here are a couple of . . .

related developments to watch for on capitol hill:

. . . Rep. Leonard Wolf (D-Iowa) is considering introduction of a bill that would ban private industrial patents on inventions developed with Federal defense funds.

. . . The Hébert Subcommittee probably will complete hearings on its weapon system concept investigation before beginning the new investigation about July 6. But don't look for a report until after the retired military men are heard.

AT NASA

An attempt to launch . . .

Vanguard III is scheduled for sometime this week. The 20-pound satellite will carry instruments to measure the effects of lightning and the radiation-heat balance between the earth and the sun.

AROUND TOWN


Some of the reports . . .

that are being passed as the "latest" in the nation's capital:

. . . Rep. Victor Anfuso's House Space Subcommittee which was set up to look into space developments in foreign parts won't be doing any travelling for a long time.

. . . The Russians may have tried but failed to launch a space vehicle to Venus during the optimum period early this month.

. . . The White House is reverting to its old pre-Sputnik attitude toward science.

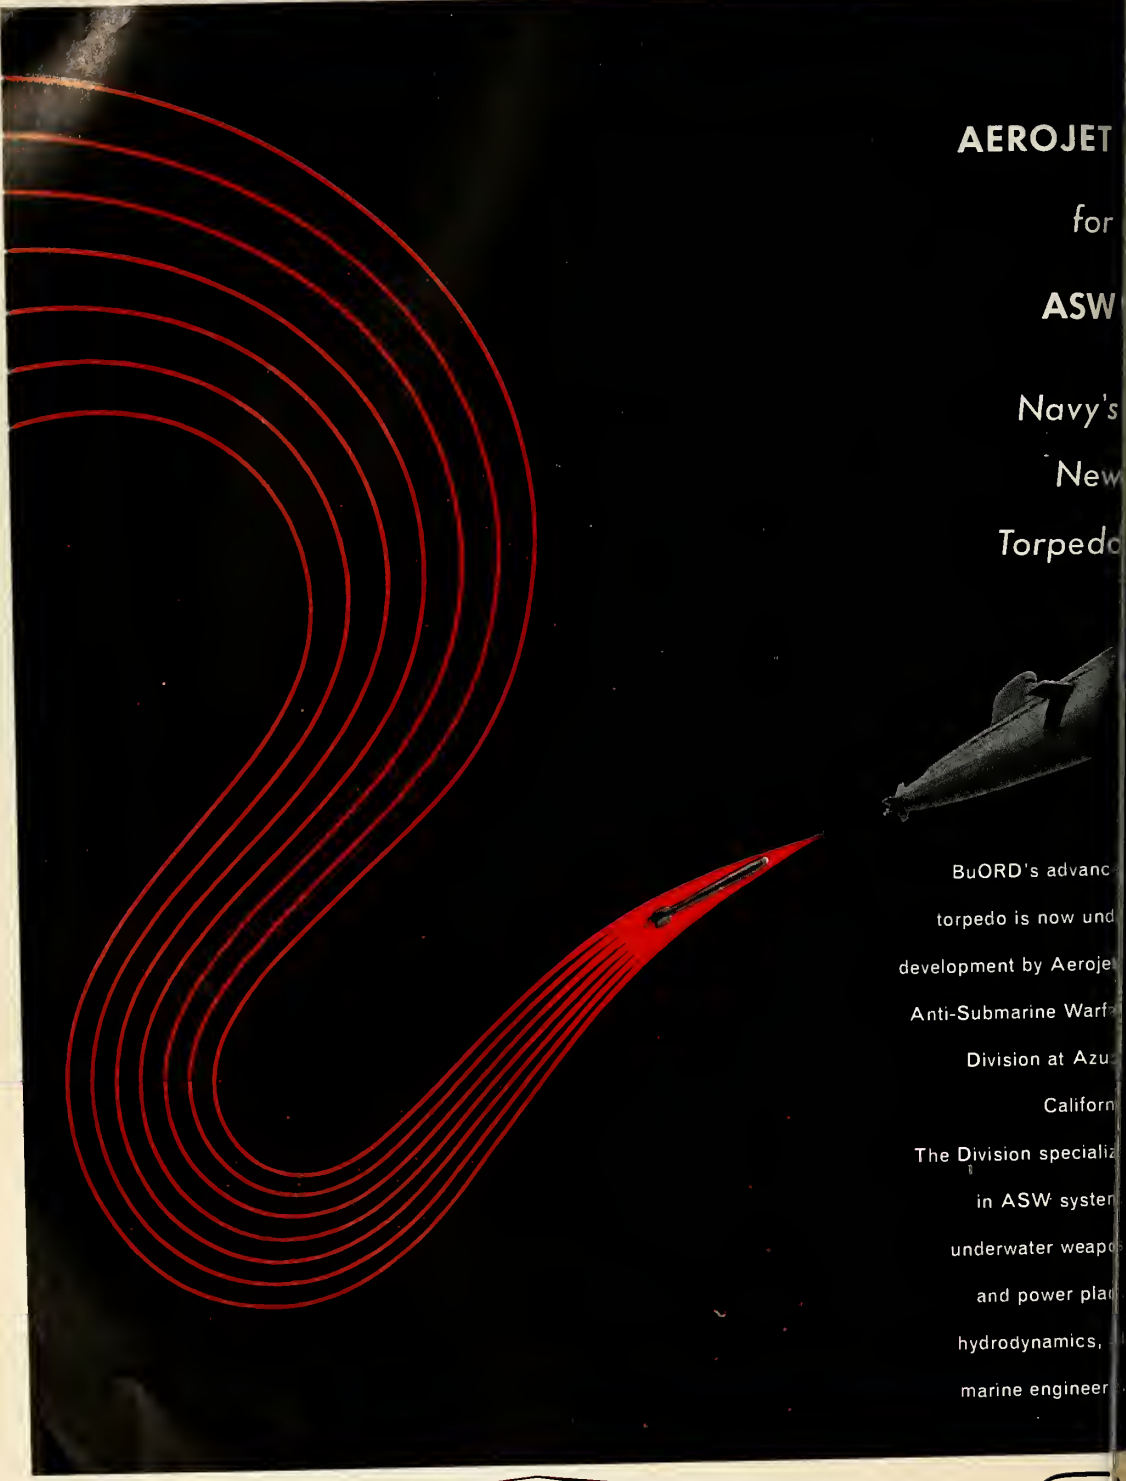

AEROJET

for

ASW

Navy's

New

Torpedo



BuORD's advanced
torpedo is now under
development by Aerojet
Anti-Submarine Warfare
Division at Azusa,
California.
The Division specializes
in ASW systems,
underwater weapons,
and power plants,
hydrodynamics, and
marine engineering.

AEROJET-GENERAL CORP.

**THE
GENERAL
TIRE**

A SUBSIDIARY OF THE GENERAL TIRE AND RUBBER COMPANY

Engineers, scientists—investigate outstanding opportunities at Aerojet. (Plants at Azusa and near Sacramento, California)

missiles and rockets, June 22, 1959

industry countdown

STRUCTURES

Construction is about . . .

to begin on second hardened *Titan* base at Lowry AFB, Denver. Low bidder to build the nine-silo complex within 770 days was **Morrison-Knudson & Associates** at \$26.9 million. M-K is building the first base. The two contracts total \$69 million.

• • •

There are reports . . .

second stage of the **Lockheed Polaris** is being seriously studied by Navy as an air launched ballistic missile. System would have aircraft carrier capability.

• • •

Navy has publicly confirmed . . .

that it is developing the nearly 20-foot long *Astor* torpedo. It forgot to mention that the **Westinghouse** development has more than twice the 10,000-yard range of the Mk. 39 and that it's a real achievement in wire-guided torpedos because some of the wire's negative buoyancy characteristics have been eliminated. The 20-knot *Astor* has more range than sonar capabilities of detecting submarines. Density layers still can't be penetrated to detect subs beyond 4000 yard range even though Navy is experimenting in low frequency and one report has it that 30-foot transducers (which slows one target ship considerably) still won't transmit an appropriate signal.

• • •

In-house study . . .

of launcher and other MSE to fire *Minute-man* from mobile railroad car (M/R June 1, p. 18) is underway by **American Machine & Foundry**. AMF called in **American Car & Foundry** to develop design of the missile train cars, which may be camouflaged as standard-appearing freight trains.

• • •

DOD will be responsible . . .

for NASA industrial security. Idea behind agreement worked out by the two agencies is to eliminate duplication and unnecessary confusion in contractor plants.

PROPULSION

Replacement of metal nozzles . . .

on solid-fueled rocket motors with plastic is being actively considered by **Aerojet-General**. Possible switch comes from A-G's own research in plastics and partially from "break-through" on *Nike-Zeus* plastic rocket nozzle disclosed recently.

• • •

New design for missile . . .

auxiliary power units by **Garrett Corp.**'s Air-

Research Division uses single block to house all operating valves and reduces valve number from 18 to seven. Turbine APU operates on either ethylene oxide, hydrazine or, with modification, a solid propellant. The 85-pound unit can deliver 5 hp for 7½ minutes.

ELECTRONICS

A 100 million-mile . . .

digital communication system reportedly has been developed for use in deep space probes. **Space Electronics Corp.**'s "Digilock" more flexible and sophisticated—though smaller—than others presently in use, reportedly can vary sample rate from 100 to 25,000 sps and trade off between transmitter power and amount and accuracy of data. With addition of demodulation circuitry, existing telemetry receiving equipment can be used with the system. Built for JPL, system should provide communication efficiency close to maximum possible under information theory.

• • •

For Atlas guidance . . .

General Electric has come up with "Hi-Fi" precision radar tracking antenna capable of measuring an angle of one foot at 25 miles. Tolerances in mechanical components of antenna and its pedestal and driving mechanisms are comparable to those in a fine watch and unprecedented in manufacture of large units.

• • •

ARPA \$600,000 contract . . .

for comprehensive study of feasibility of tracking and intercepting enemy space satellite is in hands of **RCA**. Scheduled for completion in six months, study will provide information on requirements for further R&D to design system for operational capability in 1965-70 time period.

ASTROPHYSICS

Study contract for \$50,000 . . .

has been awarded **Republic Aviation** by ARDC to find efficient means of keeping track of man-made satellites. Study will analyze trajectory of dog-carrying *Sputnik II*, which was launched Nov. 3, 1957, and came down April 14, 1958.

• • •

"Space trainer" is proposed . . .

by **Convair**, using *Centaur* rocket to orbit a four-room satellite. Two-man glide rockets would ferry crewmen to the trainer for conditioning and orientation to prepare for long space trips.



rockets and missiles

Componentry capabilities of the Kelsey-Hayes Company as a supplier of precision propulsion assemblies, structural parts and exotic high temperature materials for first and second generation rockets and missiles include—
Swivel nozzles, hydraulic control systems and auxiliary power supply systems for thrust vector control; weldments, rocket and combustion chambers for liquid and solid propellant propulsion systems; inner cones, exhaust cones, rotating wheel assemblies; vacuum induction melted alloys to withstand corrosive and extremely high temperature atmosphere; advanced design, research and development in gas dynamics, internal ballistics, transient heat and thermal stress analysis. Kelsey-Hayes Company,
General Offices: Detroit 32, Michigan

KELSEY- HAYES COMPANY

Automotive, Aviation and Agricultural Parts
Hand Tools for Industry and Home

18 PLANTS: Detroit and Jackson, Michigan; Los Angeles, Philadelphia and McKeesport, Pennsylvania; Springfield, Ohio; New Hartford and Utica, New York; Davenport, Iowa; Windsor, Ontario, Canada.



How Big A Missile Support File?

*AF list will start with some 2500 data sheets
but opinions differ on how much longer it will get*

by William E. Howard

WASHINGTON—Air Force supply channels are bulging with roughly 1.5 million pieces of equipment—from miniature transistors to multi-million dollar LOX generators. Each day 500 more items are being added to support new missile/aircraft, communications and warning systems. (In 1952 there were 725,000 items in the supply system.)

This enormous quantity, reflecting continually changing strategic requirements and advancement in state-of-the-art, is creating a king-size problem for AF compilers of the "Technical

Last in a Series on Missile Support

Information File"—a first attempt to catalogue the fast-expanding missile/aircraft support equipment field.

The first installment of this unusual reference guide being published July 1 will contain nearly 500 data sheets describing equipment in inventory. Later sheets will include equipment under development. But the question that is confronting TIF editors already is: How big should TIF be when complete?

A prime goal of the catalogue is to stem the birth rate of unnecessary equipment. For new weapons coming along, the AF wants gear listed in TIF to be utilized whenever possible by contractors, either as it stands or with modifications, rather than continue on with wasteful duplication that has already bloated AF inventories (M/R June 15, page 21.)

Can TIF become a really useful instrument in bringing about some order and standardization in the missile support field without listing the hundreds of thousands of handling, test and checkout items that already exist?

TIF Data Sheet

MIL-D-19731A				
(ITEM NAME) (TYPE OR MODEL DESIGNATION) (Date of this Data Sheet) (Approved Nomenclature, if Available) (Functional Classification)				
Cognizant Service				
FEDERAL STOCK NUMBER				
USA	USN	USAF	USMC	
STATUS OR TYPE CLASSIFICATION				
Manufacturer(s): Name or Code Number				
ILLUSTRATION				
(Include Approximate Over-All Dimensions and Weight)				
FUNCTIONAL DESCRIPTION:				
Give a brief functional description of the item.				
This information shall be presented in paragraph form and shall describe specifically what the equipment does, what it is used for, what it is used with, application, and where it is used.				
The description shall support the functional class assigned and include general operating and design characteristics.				

MIL-D-19731A	
(ITEM NAME) (TYPE OR MODEL DESIGNATION)	
RELATION TO SIMILAR EQUIPMENT:	
Describe differences and/or similarities to other equipment of the same general type and function.	
This information shall be presented in paragraph form and include the nomenclature and type or model designation of the equipment discussed.	
TECHNICAL DESCRIPTION	
The following information, as applicable, shall be listed in tabular form:	
Frequency range.	
Power output and/or input (to include amperage, KVA, number of wires, phase, type of receptacle or plug, length of cable, etc).	
Output signal characteristics, range as rated, accuracies, sensitivities.	
Pertinent electrical and mechanical characteristics and individual units of major importance (such as calibration, size, accuracy, type, etc of test indicators).	
Dimensions (if for fixed installation, give necessary data for installing; for example, 1 in. lag bolt at each corner for concrete imbedment, etc).	
Wheel size(s) and type(s).	
Towing capabilities or restrictions.	
Lifting capacity, rated and ultimate.	
Lunette details.	
Weight (dry and ready for operation).	
Tie-down provisions.	
Hydraulic and/or pneumatic characteristics (to include input/output pressure, flow, fluid/gas type and characteristics, receptacle or connector type, hose length, etc).	
Other equivalent information applicable to special or unusual equipment.	
If self-propelled automotive type equipment, include dimensions, tread, wheel base, turning radii, angles of approach and departure, minimum ground clearance, data relative to fuel system, clutch, transmission, transfer case, axles, frame, suspension, steering, brakes, electrical system, performance, cab, winch, etc.	
List, in tabular form, the types and quantity of each type of electron tube, crystal and/or transistor used in the equipment.	
REFERENCE DATA AND LITERATURE:	
To the extent known, list the following information in tabular form:	
Service and/or commercial instructional publications (give title and publication numbers).	
Engineering test report (report number and date).	
Specification: (number) - Drawing: (number) - Etc.	

PRODUCTION of a typical TIF data sheet, to be inserted in loose-leaf volume. Pages will number 2500—for a beginning.

REVERSE of the same page, giving more detail space. An EIA spokesman says some sales sheets might be made identically.

No restraint on trade likely . . .

Both AF and industry officials who collaborated on the creation of the file firmly believe it is an important step forward, although viewpoints may differ as to what and how many items TIF should include.

Air Materiel Command officials assembling TIF at Wright-Patterson AFB believe that to achieve its goal of standardizing equipment in use, the contents must be highly selective, and restrictive. Accordingly, they are proceeding—with the approval of industry steering groups—to limit TIF initially, at least, to 2500 data sheets.

On the other hand, some industry experts believe that eventually the book will have to get much bigger—perhaps listing 100,000 or more items.

"We feel that the catalogue will lose its value to the contractor if it is too big," says one high official in AMC's Office of Cataloguing and Standardization. This officer explains that TIF is being put together as a "designer's guide." Its objective is to let contractors know what is in AF inventories, and flag them on what the AF wants designed into new weapons.

• **Sales effect?**—AF officials hasten to make clear that TIF is in no way likely to act as a restraint on trade.

Information given on TIF data sheets relates only to performance specs of the desired equipment. Also listed are makers of an item who have previously sold to the AF.

However, OCS authorities say that TIF will not be utilized as a procurement directory. Buying of spares and re-procurement of items will be done in the customary fashion.

In some respects, perhaps, TIF will amount to a sales brochure for the companies whose products are contained in it because their names will be continually before contractors, who are buyers. Unique specifications of one piece of equipment listed in TIF also might be designed into a weapon system, giving one supplier an advantage over competitors.

In its initial listings, OCS is limiting TIF to items of equipment which were designed specially to military specs and which cost \$2000 or more per unit. As the number of data sheets approaches the 2500 total, AF and industry representatives from AIA, EIA, SAE and NSIA will make an evaluation as to proceeding further.

The \$2000 minimum criterion is expected to be relaxed to permit the inclusion of items—particularly electronic—which have a unit cost lower than that figure, but which are purchased in large quantities.

TIF listings fall now strictly into the first of four AF procurement categories or classifications. These are: 1) military-designed equipment now in use or under development; 2) commercial-designed (off-the-shelf) items in the military supply system; 3) commercial items suitable, but not yet being procured; and 4) equipment which must be designed new.

Class two items may be included later.

• **EIA viewpoint**—In the opinion of Henry E. Bernstein, military engineering coordinator of EIA, TIF will have to be comprehensive—reaching around 100,000 entries. Otherwise, he says, contractors will not have enough information at their fingertips to keep them from redesigning an already existing piece of hardware.

"The cost of cataloguing is small compared to the cost of redundant redesign," observes the retired Navy captain.

On this point, however, AMC officials say they don't want TIF to become a catch-all with the AF footing the bill for what they believe would amount to a lot of free advertising.

Bernstein suggests that as an alternative manufacturers of items in the third procurement category—those without status—make up their sales sheets in a format identical to TIF data sheets (see illustration).

TIF is to be loose-leafed. Pages will be removable and inserts can be made to keep the file up to date.

Manufacturers who follow Bernstein's suggestion would send their equipment sales sheets directly to contractors—leaving it up to the contractors to evaluate the product and decide whether they should insert it in TIF for consideration by their designers.

Bernstein points out, for instance, that one firm may make a cathode ray oscilloscope designed in-house that is several grades better than anything listed in current AF performance specs. The present system for inclusion in TIF would keep the piece out. But suppose a new weapon system required precisely such a 'scope?

"The contractor wouldn't know that it exists and would proceed to design it at a waste of money—just what we don't want to happen," says Bernstein.

He adds: "Improper standardization is the enemy of progress. There is a danger of retaining something beyond its obsolescence. TIF can be a help to progress if it is kept up to date and is kept fluid."

Fluidity will, as a practical matter, be largely in the hands of contractors.

They will be the medium of contacting suppliers, who will be requested to put out TIF data sheets on equipment that is being incorporated into a missile aircraft support system. Any changes the system eliminating equipment changes in the equipment will necessitate updating of TIF data sheets.

On equipment that is under development, data sheets, must be revised as the item progresses to the operation stage. Printing and distribution to about 2600 contractors and AF procurement officials is handled by OCS.

AMC officials feel that TIF should have a chance to be tried for several months before any revisions are made in the approach, particularly as regards the number of listed items.

"The reason we got together on TIF in the first place," comments one, "is that contractors complained that stock lists were too unwieldy to use from. Let's keep the catalogue small and see what happens."

X-15 Is Powered by Two Novel Generators

SCHENECTADY, N.Y.—Two unusual 40-hp generators furnish the electrical power aboard the X-15 space research plane during glide tests. The units operate completely independent of the plane's rocket engine and furnish power to keep the pilot alive and control the vehicle during descent and landing. For fuel, they use hydrogen peroxide, which decomposes into steam and oxygen to drive a high-velocity turbine producing both electric and hydraulic power.

Electric power from the General Electric units is used to energize the plane's instrumentation, provide cabin and pressure suit heat, power the inertial guidance system and computers, and operate communication, timing, metering, and recording equipment. Hydraulic power operates speed brakes, landing flaps and control surfaces.

Whirling Gas Gouges Nose Cones, Meteorites

SCHENECTADY, N.Y.—A General Electric scientist has come up with a convincing explanation of why some iron meteorites contain deep cavities that appear to have been made by a cutting tool.

Dr. R. H. Johnson says that studies of nose cones at hypersonic speeds show that whirlpools of hot gas form in imperfections in the surface of a cone (or meteorite) and cut like high-speed tools to gouge out deep cavities.

He contends, too, that this could account for the fact that some meteorites fly apart during atmospheric entry.

Notch Sensitivity Wall Will Crack

Large diameter rocket motor cases with 300,000 psi min-yield strength may be in production within a year through use of promising metallurgical techniques

WASHINGTON—If claims could fly, there'd be all manner of high-strength, wall solid rockets in the air—each with a motor case strength-to-weight ratio in excess of 1 million inches. Not that, but there'd be a free and equal choice of materials including dozens of alloys of aluminum, titanium and steel—each better than the others. And the fabrication methods! All would be “best” and would include rolled and welded, girth welded, stacked, deep drawn, deep drawn and rolled, hogged out, cold spun, hot spun, convolute wrapped, spiral wrapped, press extruded, sprayed metal. We'd be in missile heaven if claims could fly.

But they can't. And, by themselves, they can't win contracts either. It used to be that a company with a name, a reputation and an adeptness at the fine art of pitchmanship could almost be sure of a development contract to develop that shining 240,000 psi minimum-yield-strength “next goal”—which, in those days, more than we needed, “just for good measure.”

Now, as many a sadder (cancelled) and wiser motor case manufacturer can attest, those days are gone forever. Years and millions of dollars later, the “next goal” is down to a mere 220,000 psi. Yet the need is there to 300,000 psi. We're talking minimum yield strength in large diameter production cases—flight hardware—not midget motors or the occasional research program freak.

• **200,000 psi to be exceeded**—The 200,000 psi min-yield barrier to solid rocket motor case development is going to be cracked within months. After that 200,000, 230,000 and 240,000 will follow in rapid succession. And, before another year is passed, large-diameter 300,000 psi min-yield cases may well be moving into the production phase.

Claims, tricks and fancy talk won't do what does it. Rather, it will be accomplished with a sound understanding

of the problems involved; by a better-than-ever knowledge of the finer points of metallurgy; and with a craftsman-scientist-artist's approach to fabrication.

It won't be job-shop metal-working or a big-dollar scatter factor that turns the trick. Gone are the days when the gross approach to technology was all it took to cop new honors in metallurgy. Instead it will take the same intimate understanding of this art as that which has enabled such great strides to be made in other phases of missilery, such as guidance, control, re-entry, etc.

No one can detail for sure just what form the breakthrough will take when it comes, even though the alloy(s), treatment and fabrication method(s) may now be in the development stage. There are promising results already,

but nothing has been proved out.

Importantly, however, the arsenal of basic do's and don't's and promising metallurgical concepts is not only growing rapidly, but beginning to take coherent form and point the way to a breakthrough.

• **Notch sensitivity concept**—Perhaps the most elementary of these is the concept of notch sensitivity (M/R, June 8). This says, in effect, that high-strength alloys heat-treated to their optimum high strengths will have a very low tolerance for even very small flaws. It goes on to say (based now on a great variety of experimental research and testing) that if, on the other hand, an alloy is heat-treated to a lower smooth tensile strength (and more ductile condition), its toler-



HERE IS an excellent example of brittle failure during hydrotest of a solid rocket motor case. Failure in this case was at less than one-half the values of the tensile coupons that accompanied the chamber through heat-treat. It burst at 1000 psi hydro pressure. The material, a 5% chrome hot-worked die steel, exhibits all the characteristics of a notch-sensitive failure.

Cylinders provide the key . . .

ance to flaws will be greater, and the material in the notched condition will be stronger. It is against this basic concept that current motor case development is proceeding.

No material tested so far shows a notch strength in excess of 210,000 psi. Most are below 200,000 psi. The mean is 190,000 psi. This would seem to rule out any chances of breaking the 220,000 mark without developing materials that either weren't notch-sensitive or had notch strengths in excess of that mark. Fortunately, however, this isn't so.

• **Two assault forms**—The assault on notch sensitivity takes two basic routes:

The assumption is made that, on a production run, flaws are inevitable, and efforts are being made to design and fabricate accordingly.

Considerable effort is being expended both by steel-makers and motor case manufacturers to develop basic materials and fabrication techniques to minimize the possibility of flaws in the finished product. Simultaneously, efforts are being made to develop inspection techniques (unavailable now) to reliably detect these flaws—which take many forms and need not exceed a maximum dimension of 0.010" to prove fatal.

Accepting notch sensitivity as inevitable requires a more highly refined approach to stress analysis, if the 200,000 psi mark is going to be topped. This is the first step in designing to high notch sensitive strength in motor cases, and is an approach that apparently is still not too widely appreciated.

Most material min-yield and ultimate tensile strengths are stated on the basis of results obtained from pull tests on straight strip samples of the material—notched or not, depending on the test. In this test, the strip is grabbed by jaws at either end, and tensile stress is applied until (a) the material exceeds its elastic limit (min-yield stress) and (b) it fractures (ultimate tensile strength).

Traditionally, motor-case design procedure had been to take these simple coupon strengths and put them into the formula $s=pd/2t$, where s is the hoop stress; p , the hydrostatic test pressure; d , the motor case diameter; and t , the motor case wall thickness. (Formula for longitudinal stress is $s=pd/4t$, which makes longitudinal stress just half of hoop stress). Motor case wall thickness is determined by hoop stress only.

With a certain chamber pressure

dictated by propellant chemistry and burning geometry and with a material of a given min-yield strength (based on the simple pull test), the motor case designer for the most part has simply added his safety factor (say, 20% higher pressure) and solved for wall thickness. And that's how his specifications have gone to the case manufacturer.

• **Why it costs**—But this is the gross approach to both motor case design and stress analysis, and, in part, it's one of the things that has cost us so much money, time and frustration.

It also may be why so many cases that were heat-treated to a hardness of $R_c=53$ burst as though they had been heat treated to $R_c=74$. The condition of the material is not the same under bi-axial stressing as from the combination of hoop and longitudinal stress—as it is under uniaxial loading, as in simple pull test stress. Under stress a material tends to strain (stretch). This means the cross-sectional area is reduced. However, apply a second stress 90° (normal) to the first, and it resists natural strain tendencies.

In effect, biaxial stressing appears

to have the same result as a temporary embrittlement. Though this not a conclusive fact yet, work date supports the concept, and motor case development work is proceed accordingly.

For example, in comparative tests between uniaxially loaded pull-test coupons and biaxially loaded cylindrical pressure vessels, cylinder min-yield strengths have consistently exceeded those of the coupons. Also, the yield-to-tensile strength ratio of the cylinder has increased, meaning that the cylinder's min-yield strength has gone more than its tensile strength—a characteristic of embrittlement.

• **Here's secret**—It is in this high min-yield strength for cylinders lies the secret of designing around notch sensitivity lies. It makes use of the von Mises-Henckey Maximum Strain Energy Theory which, in effect, says the minimum yield strength of a cylinder will be 1.15 times that of a test sample of the same material heat treated to the same unstressed hardness as the cylinder. The formula for this $s_0^2 = (s_1 - s_2)^2 + (s_2 - s_3)^2 + (s_3 - s_1)^2$ where s_0 is the coupon min-yield strength; s_1 is hoop stress; s_2 is longitudinal stress ($s_1 = 2s_2$); and s_3 is radial stress (and in a thin-wall chamber equals zero).

What all this means is this: If you take a material with a maximum min-

Steels Researched for Solid Cases

Here are various steel alloys now being researched as best candidates for use as solid rocket motor case materials. Note the generally low carbon content of most of them; and the often-high silicon content—both representing approaches to low notch sensitivity.

Alloy and Stainless

	C	Mn	Si	Cr	Ni	Mo	W	Co	Al	Cu	V	Cb	Ti	N	P
Vascojet 1000	.40			5.0		1.30					.50				
Lapelloy	.30	1.05	.30	11.5	.25	2.75					.25				
12 MoV	.25	.50	.50	12.0	.70	1.0					.30				
422 MOD.	.27	.85	.25	12.0	.20	2.25	1.75				.50				
301	.15*	2.0*	1.0*	17.0	7.0										
201	.15*	4.5	1.0*	17.0	4.5									.25	
Tenelon	.10*	14.5		17.0										.40	
TRC	.08	16.0	1.0*	16.0	1.0									.20	
14-1-17	.12	17.0		16.0	1.0									.15	
2021	.10	15.0	.62	16.0	1.0						.23				
Am 355	.12	.95		15.5	4.5	2.75								.10	
Ph 15-7 Mo	.09*	1.0*	1.0*	15.0	7.25	2.50			1.15						
AFD 183	.35	18.0	.60*	12.5		3.0					.80			.20	
Stainless W	.10*	1.0*	1.5*	17.0	7.0				.50*			1.50*			
Armco 1	.07	.60	.48	11.0	7.0	5.5			1.15	.75					
Armco 2	.07	.60	.40	15.0	6.0	2.5			1.15	3.0					
Armco 3	.05	.40	.40	13.0	4.0		3.0			3.5					
HNM	.30	3.5		18.5	9.5									.23	
HTX	.45	8.5		21.0	8.5	1.50					*Max.			.23	

Carbon and Low Alloy

	C	Mn	Si	Cr	Ni	Mo	V	
AISI 1055	.55	.60-.90						
AISI 4130	.30	.40-.60	.20-.35	.80-1.10		.15-.25		
AISI 4135	.35	.70-.90	.20-.35	.80-1.10		.18-.25		
AISI 4340	.40	.60-.80	.20-.35	.70-.90	1.65-2.00	.20-.30		
AMS 4344	.35			.80	1.80	.35	.20	
Air Steel X-200	.40		1.5	2.0		.50	.03 Min.	
MBMC #1	.45		1.5	1.0			.01 Min.	
Hy-Tuf	.25	1.30	1.5		1.80	.40		
UHS 240	.35	1.25	1.5	1.25		.35	.20	
Tricent	.38	.80	1.5	.84	1.80	.35	.10	
17-22 AS	.30	.55		1.25		.50	.25	

length of 200,000 psi (of which there several), fabricate it into a motor, and then heat-treat it to a maximum notch coupon min-yield strength (200,000 psi), you will have a 230,000 psi min-yield motor case (1.15 times 200,000). This comes from substituting 200,000 for s_0 in the above formula and solving for s_1 .

Choice is steel—In choosing materials to meet high-strength motor requirements, with certain specification exceptions, the big choice is steel—any one of over two dozen steels (see accompanying tables). Of these, maybe half a dozen have usable notch strengths in excess of 200,000 psi. None has been proven to exceed 200,000 psi.

Aluminum for the most part hasn't been considered for large diameter rocket motor cases because of its relatively low modulus. However, on a strength-to-weight ratio basis it's almost an even-Steven competitor with steel. And Alcoa's new X-2020 alloy exhibits very favorable strength properties at elevated temperatures. With the fabrication techniques being provided, aluminum may yet get in the running.

Titanium apparently is way out of the field, not only due to the difficulty in fabricating it, but also because it is very inconsistent in its response to heat-treatment. And, at the strength levels being considered, all steels must be heat-treated.

Two of the most promising alloys being tested in solid rocket motor cases are X-200, a low carbon air-hardening steel, and MBMC 1. Both are U.S. Steel developments, and give the preliminary promise of much improved notch sensitive characteristics, i.e., high notch strengths.

One thing to watch out for: make certain heat-treat temperature exceeds the designed environmental operating temperature of the motor case. This means, almost without exception, heat-treating to a hardness of under $R_c=50$, which is desirable in obtaining high notch strengths.

Efforts to eliminate flaws, and thus get around notch sensitivity by ending up with no notches, concentrate primarily around fabrication techniques. Generally speaking, the more a material is worked, as in rolling or spinning, the more flaws tend to be worked out. It's rather like getting large air bubbles out of bread dough by kneading it. If the metal is worked enough, dislocations and inclusions, local brittle spots and other discontinuities can be worked out and made homogeneous with the parent metal.

Success in spinning—This is the main reason such marked successes have recently been achieved by spinning

Rate of Change
This table shows typical rate of change of the notch tensile to smooth tensile strength with increased strength in the smooth coupon test sample. X-200, 300-M and UHS-280 are three typical steels being tested now for use in solid rocket motor cases.

Yield Strength —psi @ 0.2%	Sharp Notch to Tensile strength ratio	Test grain Direction	Tempering Temperature
X—200			
180,000	0.95	L & T	1175°
210,000	0.81	L & T	1075°
225,000	0.43	L & T	975°
240,000	0.31	L & T	830°
300—M			
180,000	1.00	L	1160°
210,000	0.41	L & T	850°
225,000	0.47	L & T	775°
240,000	0.49	L & T	700°
240,000	0.40	L & T	500°
UHS—280			
180,000	0.89	L & T	1100°
210,000	0.41	L & T	650°
225,000	0.39	L & T	650°
240,000	0.36	L & T	500°

motor cases. Typical procedure here is to start with a forged (and perhaps machined) blank whose inside diameter equals that of the finished case, whose length is half and whose wall thickness is twice that of the finished product. Then, in one-to-three passes with spinning equipment (Hydro-spin, Hydroform, Flo-Turn, etc.), the metal is literally pushed into the desired configuration. Though greatest success so far has been achieved with cold spinning, impressive results have recently been reported by at least one contractor with hot spinning—where the blank is heated before each pass.

Spinning used in combination with other fabrication techniques (which unfortunately cannot be detailed at this time) has produced the best results. One Navy (*Polaris*) engineer is convinced the best cases for both *Polaris* and *Minuteman* will be spun.

The old, well established technique of either cold or hot working welds goes a long way towards minimizing the notch effects of under-bead cracks and normal cracks in welding.

Care should be taken to determine the cracking tendency of the material being welded (whether under-bead or normal), in order to align the crack direction normal to the longitudinal (lowest) stress vector and design the case (or pick materials) accordingly.

Insofar as notch sensitivity is concerned, a notch is any discontinuity in the body of the material or in its contour. For this reason, it is almost mandatory in welded cases that the weld bead be ground flush with the rest of the case.

Sharp corners in design should be avoided wherever possible. Anything that tends to produce a bending moment when the case is pressurized is dangerous. This includes ovality in the unpressurized case, which wants to "bend" into the round configuration under pressure, or a dent. The latter can cause local stresses double those in the undented case.

In some instances the material supplier tries to take the notches out before it ever gets to the fabricator. One approach to this is U.S. Steel's sandwich rolled sheet where several layers of plate are rolled as a laminate. Advantages claimed for this technique are: cross rolling; reduction in directional differentiation of grain structure; minimization of inclusions in any direction; high surface density; freedom from normal surface flaws; better decarburization control; closer tolerance control (thickness held to 0.0205" to 0.0215" in 130" wide sheet). Burst tests with small welded cylinders are being conducted now.

Controlled decarburization has, itself, been suggested as a means of minimizing notch sensitivity—particularly due to surface flaws and scratches. Theory here is that more ductile surface makes it easier for stress relieving plastic deformation to take place.

• Here are "buts"—One final word of caution: minimize hydrotesting. If there is any tendency towards notch failure—crack propagation—hydrotesting will intensify it. Ideally, it would be best to inspect all flaws out of a motor case and thus make even one hydrotest cycle unnecessary.

But this not being possible, the compromise generally being adopted is three static tests of three minutes each. Value of a dynamic (surge) test is seriously questioned, since materials at the strength levels being considered generally are not strain-rate-sensitive.

Obviously, a lot more is being done to eliminate or get around notch sensitivity. But basically all specific approaches fall within the general parameters outlined above. Little has been said about strip (spiral) wrapping with very thin (0.015" thick), high-strength (300,000-to-500,000 psi ultimate) strips, since serious problems remain in attaching forward and aft closures, and current organic bonding techniques make spiral wrap cases subject to strength failure under aerodynamic heating.

Drag Brake Proposed for M-I-S

Avco says ICBM research and aero-medical progress have made possible design with advantages of simplicity along with lightweight and reduced production expense

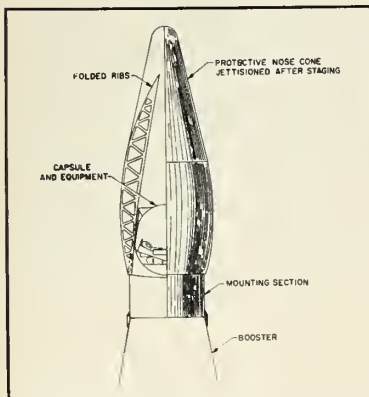


FIG. 2—Drag brake satellite vehicle mounted on *Atlas* booster for launching.

EVERETT, MASS.—Details of a manned satellite design based on a drag brake—rather than retro-rockets as planned under NASA's Project *Mercury*—have been revealed by Avco's Everett Research Laboratory.

Under Avco's system, which has been under research for three years, the drag brake would perform all functions now in a retrorocket system: orientation of vehicle, retrorocket with autopilot, heat shield, and a sequence of decelerating parachutes.

In announcing the system, Avco scientists pointed out that manned satellite designs which have been discussed publicly are adaptations of airplane or nose cone technology, and that the re-entry heating problem and the deceleration which must be faced

by a human passenger have dominated most manned satellite discussion.

However, Avco said that progress made during the ICBM program allowed the company to design a vehicle without over-emphasizing re-entry heating considerations. Furthermore, progress in aero-medical research makes it clear that the 8 g decelerations which must be faced in tangential constant drag re-entry are not a serious problem either, should not dominate the design.

While the retro-rocket design approach to Project *Mercury* was cited in research details furnished Avco, retro-rocket systems were used as a comparison.

• **Advantages**—In summarizing advantages of the drag brake satellite recovery system and its space flight potential, Avco said its "multiplicity of functions" leads "to several advantages over other recovery systems which all require separate subsystems to perform each function."

These advantages were cited:

1. The system—when operating—will, because of its simplicity, show a greater reliability because the reliability of any system can be only as large as the product of the reliability of all its subsystems.

2. Since there is only one main component, the development will require less time and will be less costly than the development of the several subsystems of other satellite recovery systems.

3. The operational aspects of orbital flight with a drag vehicle will be far less complicated. Avco pointed out that a retro-rocket system requires a device which maintains accurate orientation of the vehicle; a retrorocket plus its auto-pilot; a heat shield which may or may not need to be jettisoned and a final landing system consisting of a sequence of parachutes which



FIG. 1—Model of Avco drag brake. Mechanical engineering and structural design by All American Engineering Co. in cooperation with the Avco-Everett Research Laboratory.

ing the vehicle down at about 100 ft.

4. Control aspects of a drag brake vehicle will not require accurate knowledge of the orbit, and the track requirements are much reduced in those of a retro-rocket system.

5. The drag brake has inherent usefulness in the circularization of highly elliptic orbits, and

6. The vehicle will have a distinct weight advantage over other re-entry vehicles. Avco said the weight required for a drag brake vehicle to recover a payload is less than half that required by a retro-rocket system, and use of a good ablating heat shield in the retro-rocket design would reduce the drag brake vehicle weight advantage by 100 to 200 lbs.

• **Details**—Here are design details furnished by Avco:

The manned satellite design is built of a stainless steel drag brake (Fig. 1). Opening and closing the structure orbit results in a 20:1 drag variation. This variation causes a corresponding change in the rate of descent orbital lifetime.

Controlled variation of the drag according to a preset program will permit landing at a pre-selected point with an accuracy of ± 150 nautical miles. The extended structure has a low drag, $1\frac{1}{2}$ #/ft², and consequently the vehicle decelerates high in the atmosphere, radiating the heat away at temperatures which never exceed conventional gas turbine practice.

The drag brake also yields a terminal velocity low enough so that no additional parachutes are required for landing at ground level.

During launch the drag brake satellite is mounted on the booster in the stowed position (Fig. 2). The man lies in the recommended supine position on a contoured couch inside the capsule. The flexible drag brake covering material is folded inside the ring of ribs. The tractor type escape system is mounted at the forward end of the capsule. The drag brake is covered by a protective nose cover. At staging, when the vehicle is essentially out of the lower part of the atmosphere, the nose cover and escape system are jettisoned.

105-mile orbit—The booster vehicle accelerates the satellite until the desired velocity vector has been achieved. At this point the satellite and booster are separated and the drag brake vehicle starts its journey in space. The satellite would be launched into a 105-n. mile near-circular orbit, lasting a lifetime of two days in the drag or closed position of the brake—and permitting emergency recovery in two hours.

Avco pointed out that emergency recovery times of less than the orbital

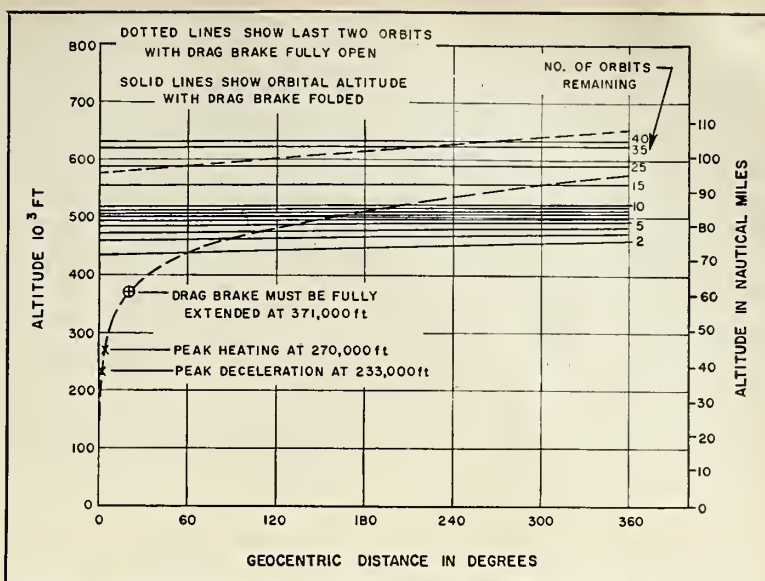


FIG. 3.—Landing point control by drag variation. The difference in descent rate or orbit decay is shown for a 20:1 drag variation from $W/C_dA \pm 1.5$ to 30.

period "do not make sense" because recovery must be effected at a specific point in every orbit in order to minimize the vast problem of location after landing.


At 105 n. miles, the small but distinct amount of residual atmosphere will exert forces on the vehicle. Because of the large extended structure, even in the closed position these forces are sufficient to exert the necessary

movements to orient the vehicle into the air stream, Avco said. The period of this motion at 105 n. miles altitude is several minutes.

For a drag brake satellite, re-entry is made up of a number of distinct phases. First, the satellite descends from the orbital altitude to the region from which a controlled re-entry is made.

Next, the drag is controlled accord-

FIG. 4—Landing Point Control System

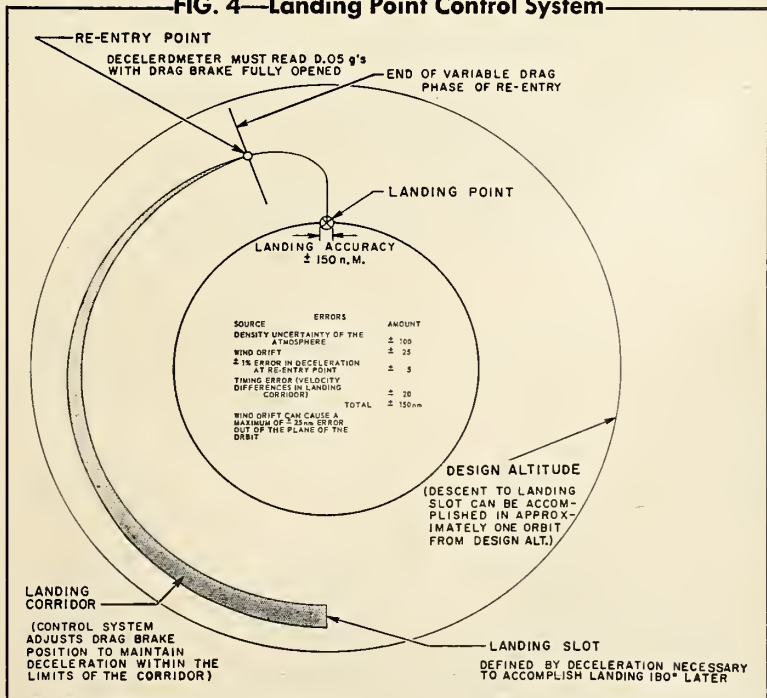

ing to a preset program for about $\frac{1}{2}$ orbit in order to achieve a given velocity vector at a particular point. Finally, the drag brake is fixed in the open position at the onset of serious heating and the vehicle passes through the heating and deceleration peaks and achieves terminal velocity at about 200,000 ft. From here down the vehicle drifts at terminal velocity and lands at 50 ft./sec. at sea level.

The principal of operation of the variable drag landing point control is shown in Fig. 3. Concept is that the descent rate or lifetime of decaying satellite orbits can be changed significantly by changes in the vehicle ballistic parameter, $W/C_D A$.

For instance, from an altitude of about 90 n. miles one can re-enter in as many as 15 orbits or in less than

one orbit, depending on the drag brake position, i.e., ballistic parameter, $W/C_D A$.

In fact, Avco said, in the geometric mean drag brake position, and only 3000 n. miles from the landing point, the landing point can be altered by approximately plus 2000 and minus 1500 n. miles.

• **Control philosophy**—A detailed control system philosophy which operates on the above-stated principle has been developed. The system depends on two simple measurements: time and acceleration. The time serves to locate the vehicle with respect to the landing point.

As long as the satellite is still in a nearly circular orbit, the orbital period is essentially invariant with the small ellipticities due to drag and drag varia-

tions. Thus the timing from either the insertion point or from a later fix locates the satellite accurately. This relationship holds until the onset of large deceleration forces. Thus ideal or nominal drag variation with time can be established for the controlled drag phase of re-entry.

A body-mounted accelerometer measures this drag and compares it to the measured drag and to the nominal value desired. The control system can thus sense whether the drag is correct too high, or too low, and can produce signals which vary the drag brake position so as to eliminate the difference between the nominal and measured values. Avco said this system does not require accurate information about the orbit and therefore tracking requirements are simplified.

According to Avco, the system is capable of correcting the effect of ellipticity, altitude error at the start of the controlled phase, errors in the knowledge of the upper atmosphere and density variations of either the latitude or diurnal type.

The result of an error analysis fixes a density range from which the control system can achieve a landing point accuracy of plus or minus 150 miles in the orbital plane. This is indicated by the "landing slot" shown in Fig. 4. During the controlled phase the satellite flies within the "landing corridor," correcting the drag brake position in accordance with the control system dictates, until it achieves the proper velocity vector at the re-entry point.

• **500°F temperature**—From the re-entry point to final touchdown no further functions are required, Avco said. The nose of the capsule will heat up to a temperature of about 500°F when the vehicle is only 1000 n. miles from the final landing point. Up to this point the linear relationship between distance and time will have been accurate to 20 n. miles. At the low drag parameter, $W/C_D A$, of 1.5 peak heating occurs at a very high altitude and consequently the heat transfer rate and the radiative equilibrium temperatures will be relatively low.

The maximum temperature encountered by the structure at the capsule nose surface will be less than 1500°F assuming an emissivity of 0.85. The drag brake surface, which can radiate from both the front and rear surfaces, should not exceed an equilibrium temperature of 1200°F.

At peak heating, at 270,000 ft. altitude, the deceleration will be about four g. After peak heating the deceleration will continue to increase and should reach 8.2 g at 233,000 ft. The time above eight g will be approximately 20 seconds and should be well with

FIG. 5—Drag Brake Re-entry Conditions


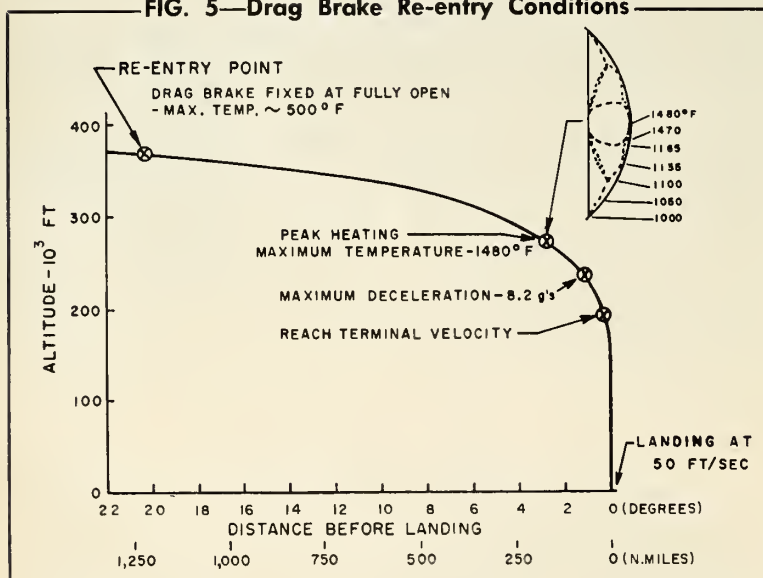


FIG. 6—Re-entry Temps & Accelerations

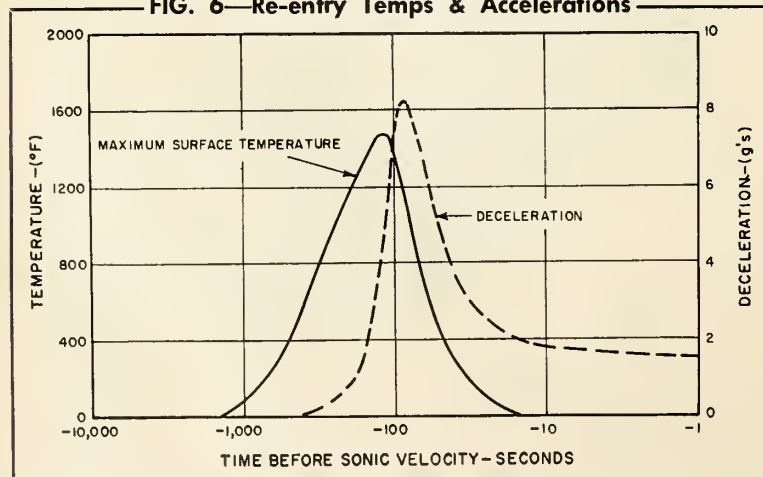

established limits of human endurance. At peak deceleration the maximum temperature will have decreased to 1130°F (Figs. 5 and 6).

Avco said the relative time of occurrence of the peaks of heating and deceleration points out an interesting possibility for future drag brake vehicles. If at the instant of peak heating (i.e., 4 g) the acceleration is held constant by retracting the drag brake slightly, then the peak re-entry g can be reduced to four—without any increase in maximum temperature. The peak heating condition would merely be held for a somewhat longer time, which does not penalize a radiating re-entry vehicle structure.

The drag brake will continue to decelerate and will approach terminal velocity just under 200,000 ft. The terminal velocity will decrease with increasing air density until at sea level the vehicle will land at 50 ft./sec. During the terminal descent, which takes approximately 15 minutes, the large metallic surface should be an excellent target for tracking and locating the vehicle at the landing.

• **Mechanical details**—The mechanical problems of building a drag brake satellite system have been faced in the detail. The device consists of four basic components, i.e., the ribs, the covering material, the actuating mechanism and the capsule. Of these the ribs represent over 50% of the total weight of the drag brake.

The total weight of the ribs could be reduced by decreasing their number, Avco said. However, the consequent departure from a true spherical surface due to the scalloping effect of the covering between the ribs would increase heat transfer on the ribs. The ribs are .020" stainless steel beams with reinforcing cap strips. Buckling due to compression of the cap strip is the most critical design condition.

The covering material should be as light as possible, Avco points out. Stainless steel cloth made of .001 wire woven into a close, 400 x 400, mesh is commercially available, and this material meets all the requirements except that it is somewhat porous. Even a small amount of porosity increases the heat transfer on the drag brake significantly due to the removal of the cool boundary layer air blanketing the surface.

Several methods of reducing the objectionable porosity are under consideration. It is presently possible to build up a drag brake skin out of a layer of the above cloth, a layer of thin (.005 inch) solid sheet but cut into circumferentially aligned ribbons or shingles, and another layer of cloth of a coarser mesh.

The shingles will eliminate the po-


rosity, yet are flexible enough to satisfy the folding requirements. The two layers of cloth maintain the shingles in place and prevent tearing. The air loads can actually be transmitted to the ribs by any one of the three layers alone.

• **Actuation choices**—The actuating system and capsule do not represent serious design problems, Avco said. It is mostly a question of arriving at the lightest and simplest structure for each. Actuation can be either pneumatic, electric or mechanical. A two-way pneumatic system is proposed.

• **Would-be sphere**—The optimum pressure vessel, i.e., a sphere, is very nearly a compatible shape for the drag brake vehicle. Only a slight conical section need be interposed between the spherical top and bottom halves. The conical section is extended both up

and down to form the hinge points for the drag brake. This capsule weighs only a few percent more than an equivalent spherical vessel.

Avco said that in this design the configuration was dictated by the orbital, re-entry and escape conditions, rather than by the sea level landing speed. The resultant landing velocity of 50 ft./sec. is somewhat higher than has been proposed in other satellite designs. However, Avco believes that the decelerations on the passenger can be kept at a level equivalent to a 30 ft./sec. landing by a shock-absorbing structure similar to aircraft arresting gear. This can be accomplished, Avco said, at the cost of far less weight than would be needed to reduce the landing velocity by geometrical changes or by adding recovery parachutes.

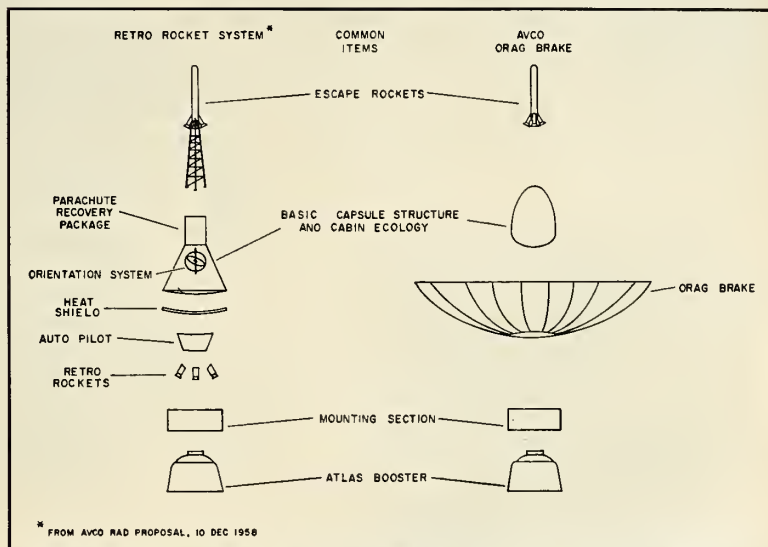

FUNCTIONAL comparison of the Avco drag brake and a typical retro-rocket system. Company says brake's "multiplicity of functions" gives it "several advantages."

Weight Comparison of Systems


Retro Rocket System		Avco Drag Brake	
1. ADDED STRUCTURE	133 lbs.	1. 0	
2. BERYLLIUM HEAT SHIELD	398	2. 0	
3. AUTOMATIC ORIENTATION SYSTEMS	137	3. LOW TORQUE SYSTEM	25.5
POWER	66	4. 0	
4. RETRO ROCKET	207	5. 0	
5. RECOVERY SYSTEMS	165	6. DRAG BRAKE	425
6. 0		7. SECOND STAGE ESCAPE	50
7. 0	1106 lbs.		500 lbs.
LAUNCH WT.	2902 lbs.		2297 lbs.
ORBITAL WT.	2207		1527
RE-ENTRY WT.	1914		1399
Common Items for Both Systems			
BASIC STRUCTURE	167 lbs.	PILOT SUPPORT	46
INHABITABLE CAPSULE	133	COCKPIT	17.
ESCAPE SYSTEM	695	NAVIGATION AIDS	41.
ENVIRONMENTAL EQUIP.	70	COMMUNICATIONS EQUIP.	212.0
		INSTRUMENTS	15.
		RECORDING EQUIP.	24
		POWER SUPPLY	157
		PROGRAMMER	9
		MAN AND SUIT	210
			1796 lbs.

Re-entry Stresses Simulated in Lab


EVERETT, MASS.—A 10-megawatt high-pressure arc plasma generator which realistically duplicates the pressures and temperatures met by ICBM nose cones and satellites on re-entering the atmosphere has been developed by Avco's Everett Research Laboratory.

The unit uses five arcs instead of the usual one to generate this tremendous power. Each of the five nozzles is separately powered and water-cooled. The giant generator itself is powered by 2000 12-volt truck batteries.


The facility was developed by Avco as part of its research and development program on ICBM nose cones. Models are subjected to the high-velocity, 15,000-degree plasma jet to evaluate the performance of ablating materials and heat sinks under re-entry conditions.

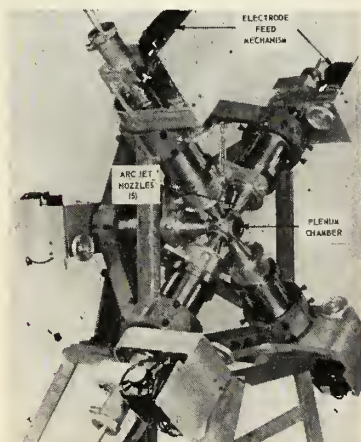

AVCO technician prepares the arc wind tunnel for firing. Confusion of pipes, tubes and cables supplies the device with water, air and power.

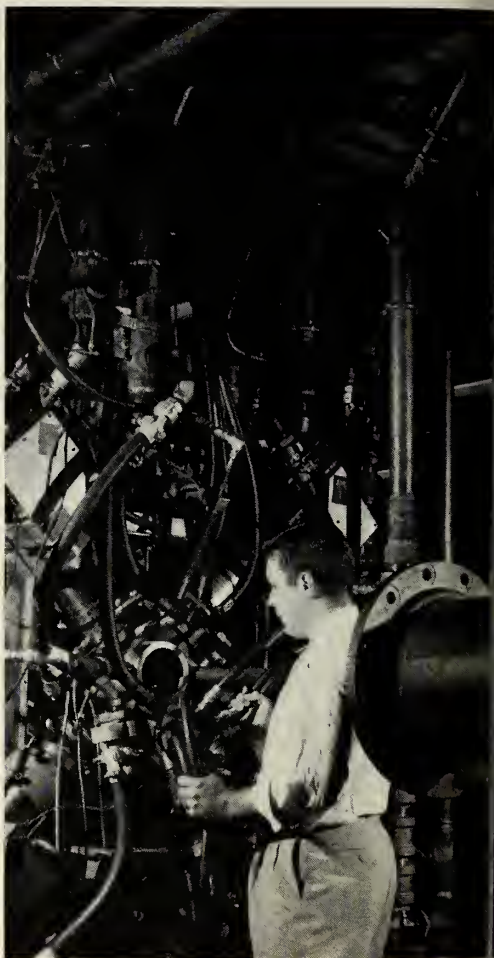

JET NOZZLE assembly. Each of the five jets, powered by arcs from water-cooled graphite cathodes, discharges hot plasma into central copper plenum chamber.

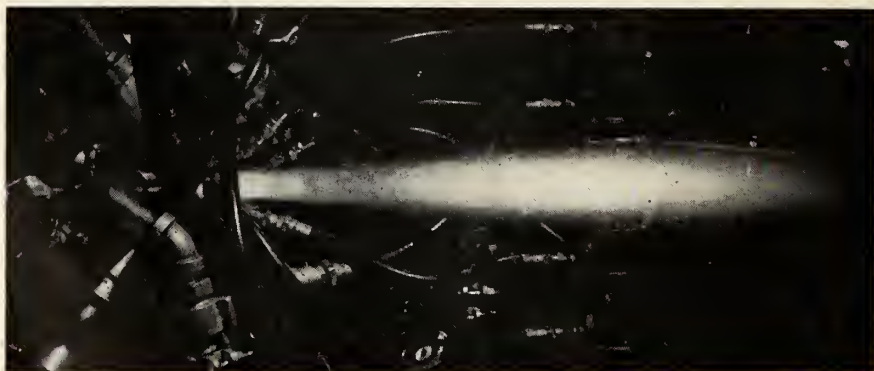

TEN MEGAWATT arc jet in operation. The jet, containing five to six million watts of energy, issues through supersonic nozzle.

NEED A TAPE WORKHORSE?

"SCOTCH" BRAND Sandwich Tapes

wear longer, cut head maintenance even in digital work


2
36
578
4916
72271
355009
4400932
30562217
703220522
8806111956
37773220071
662225436662
3200973327106
77894440032119
522789007830062
9340062112213977
22273460007244119
890026782334110024
4033219077823224422
22247323680274118034
687321900333405589226
350668322118856723323
40329996779233001166
8220032320011237787
300337444323801232
11345788821723309
6697700329008022
210322431102143
73761670553762
0723881760203
762030784301
42427750593
3090410782
490589547
17130273
6302222
006736
92181
6700
259
46
3



Tote that tape—change that reel—clean that head! If your project atmosphere sometimes seems that way, "SCOTCH" BRAND Sandwich Tape comes to the rescue. How about the possibility of getting over 50,000 passes out of a computer tape? And if that sounds attractive, consider the value in a tape that has no rub-off, won't give you any head build-up, drastically reduces maintenance and replacement on costly head assemblies.

One user found that the simple change to "SCOTCH" BRAND Sandwich dramatically reduced head replacements. And—where heads previously had to be cleaned after every run, "SCOTCH" BRAND Sandwich Tape cut cleaning to once a week.

The secret's in the Sandwich—the high potency oxide magnetic coating is sandwiched between the tough polyester base and a thin protective plastic layer. The coating never contacts the head—you get smooth, low-friction tape movement, plus an end to rub-off, head build-up, and a reduction in erosion of the critical slit in the recording head. Though the 50 micro-inch protective layer causes some slight reduction in high frequency response, the plain facts are that Sandwich Tape packs up to 600 pulses per inch in digital work—has broad usage in AM, FM, or PDM applications.




In "SCOTCH" BRAND Sandwich Tape you have a tape workhorse, pulling a big load over long distances. One user reported fewer drop-outs with each successive pass. As his recording heads were cleaned, the contaminates proved to be in the system, not the tape. Speaking of drop-outs, beware the villainous cigarette—often a culprit. One careless gesture and an ash can cause 40 to 60 drop-outs.

Whatever your application — data reduction, acquisition or control programming — count on 3M technology to create tape of higher uniformity and reliability for error-free performance.

"SCOTCH" BRAND High Output Tape No. 128 gives you top output at low frequencies, even under extremes of ambient temperatures. "SCOTCH" BRAND High Resolution Tape No. 159 lets you pack more bits per inch, offers extra playing time. Finally, for top performance at low cost per foot, "SCOTCH" BRAND Instrumentation Tapes Nos. 108 and 109 remain the standard for the industry.

Where there's no margin for error, there's no tape like "SCOTCH" BRAND. For more details, write Magnetic Products Div., 3M Company, St. Paul 6, Minn., or mail the reader inquiry card. © 1959 3M Co.

"SCOTCH" is a registered trademark of 3M Company, St. Paul 6, Minnesota. Export: 99 Park Avenue, New York, N.Y. In Canada: London, Ontario.



SCOTCH BRAND MAGNETIC TAPE
FOR INSTRUMENTATION

MINNESOTA MINING AND MANUFACTURING COMPANY
... WHERE RESEARCH IS THE KEY TO TOMORROW



NASA Space Lab Plans Outlined

ARS meeting also hears debate on the long-term value of Project Mercury 'holding facility' and reports on ramjet, ion engine and APU developments

by Frank G. McGuire

SAN DIEGO—Planned as a "sound-ing board" for practicable ideas rather than a mere exchange of technical information, the American Rocket Society's 1959 semiannual meeting, June 8-12, provided an extremely well-managed forum for all types of astro-nautical ideas and problems.

The meeting, marked by attendance of some 2000 members and presenta-tion of 115 papers, covered such broad topics as the economic impact of space technology, politics in the Space Age and the influence of astronautics on contemporary thought. But it also ful-filled its original role as clearinghouse for treatment of more technical sub-jects.

Scattered throughout the activities were such names as Whipple, Stuh-linger, Medaris, Yates, Douglas (Don-ald, Jr.) Stapp, Kaplan, Dempsey, Ehricke, Urey, Silverstein—almost all of whom presented papers.

A keynote was the solid reality characteristic of most papers. There was little "wild, wild blue yonder" speculation on imaginary or insignifi-cant academic problems. Instead, there was a down-to-earth approach keyed to actual operational requirements, lo-gistics, and costs. One of the first sessions, that on Logistics and Oper-ations, was aimed at making R&D personnel aware of logistical and op-erational problems involved in space vehicles and weapon systems.

• **Balance demanded**—Most papers presented at this session were highly critical of our pouring millions of dollars into missile performance, while spending only a fraction of that amount in appropriate instrumentation. "Sup-porting facilities, such as are provided by our range and its instrumentation, are too often taken for granted," ac-

cording to Maj. Gen. Donald N. Yates, commander, AFMTC, Patrick AFB, who added: "We have been driven into a frantic race with missile per-formance in our job to provide in-strumentation of commensurate per-formance."

Other speakers echoed the general's remarks and pressed for a more bal-anced program, rather than one stres-sing only the "bird" itself. "We are now at the bottom of the barrel . . . in instrumentation development," Yates said. He declared that instrumentation has become the bottleneck of a develop-ment program, as far as time is con-cerned.

• **Solid-state future**—The electron-ics segment of astronautical engineer-ing was warned that it, too, is ap-proaching the "point of diminishing returns" in one phase of its field—component microminiaturization. "For-tunately," said Donald B. Duncan of Autonetics, "there is an extensive re-search effort which . . . can replace, not existing components, but existing circuits," with solid-state circuits.

These units, packaged as one, re-place present devices in which com-ponents are packaged individually, then connected by wiring or printed cir-cuitry. Duncan predicted an accel-erated development of these solid-state circuits, bringing a major technological breakthrough within a few years.

The time will come, he predicted, when a small digital computer, now requiring decision, memory, and other circuits, will consist of a single block of material incorporating all these ele-ments.

"The material might consist of a single thin crystal of a semiconductor with dimensions on the order of inches, which is modified by depositing on the surface various elements to change the

lattice structure of the semiconduct- or to modify in other ways the surfac- characteristics. It is possible that the deposit of these various thin film can be made by some automatic pro- cess and that the time to modify the crystal so that it is a complete dig- ital computer can become a matter of minutes," Duncan said.

• **Space observatory**—The propos- ed launching of a 2500-pound orbiting space observatory by NASA came for some attention. The platform, mounting six telescopes up to 36 inches, would be placed in a 500-mile orbit in a two-stage configuration of *Vega* not less than two years. The prelimi- nary planning stages of the program have been funded, and several inter- mediate steps are in the works, such as orbiting a solar observatory satell- ite of several hundred pounds at about 300 miles.

The unmanned platform will be designed to aiming accuracies of a second of arc, relying on a flywheel system instead of control jets. The high accuracy would drop if men were put aboard—even the heartbeat of a crew member could conceivably distur- b it. "Actually," commented Dr. Frank Whipple, "we're not even aware of what disturbing influences on the plat- form might be introduced by the blood flow of a crew member."

Objectives of the orbiting observ- atory are several: to make a complete map of the sky; locate "cold" stars presently not visible; and locate pos- sible planets in "nearby" space (within 10 light years).

Aiming of the platform would be by radio control from earth. The flywheels would be set in motion in the desired direction at the proper time, then stopped at the correct point. The destruct system would quite likely

ult into the platform, or at least its dio, to eliminate it from the communications spectrum and to prevent becoming a hazard to future navigation.

The six telescopes would all point the same direction, but use different ters. This would eliminate the need for a mechanical filter-changing system which might cause reliability problems if just one telescope were used. Life of the platform was estimated, preming realization of plans, at over 10 years.

• **"Holding facility"**—A not-previously-publicized facet of the Project Mercury program was brought out at a meeting in several technical papers. This was the "holding facility" concept involving pre-launch and post-launch isolation of astronauts for training, health and psychological preparation and debriefing.

The holding facility is defined as "training and medical maintenance center" for the space crewman. To do its job—completely preparing the astronaut for his mission—the facility really would be located close to the launch site; provide quarters for all support personnel; and be equipped to modify life support gear, simulate near-space conditions, and carry out final screening and selection.

The holding facilities would give biomedical personnel maximum opportunity to control and observe the astronauts' environment and behavior before and after a mission.

It was estimated that for four to six weeks prior to launch the astronaut would be isolated from his family and undergo an intensive training period in simulators, centrifuges, and other devices. The holding facility now being planned for the Mercury program at Cape Canaveral will be able to simulate every parameter of the mission except weightlessness.

Biomedical experts at the meeting had varying opinions of the holding facility. Some felt that the four to 12-week period was absolutely mandatory. Others, including Toby Freedman of NASA, felt that the holding facility with its isolation concept would be fine for a one-shot mission, but that if the aim of continuing space flight for long periods of time, it should be made as "in-special" as possible, while still maintaining the requirements necessary for successful completion of the mission. The amount of special treatment for astronauts was the main point of contention.

• **Lamps for wives?**—Freedman's paper conceded that it is worth every effort to keep the astronaut free from disease. But he questioned the wisdom of an absolute quarantine. ("In short, could our space pilot sleep with his

THE GRAND CENTRAL REPORT

Tennessee Gas Transmission Company and Food Machinery and Chemical Corporation, the parent companies of Grand Central Rocket, have extensive investments in the energy field. In addition to their interest in Grand Central, TGT is in the oil, gas, and petrochemical fields, while FMC has three other divisions in dimazine, peroxygen chemical and boron propellants as well as other fuel and related products.

It is the long-range plan of both parent companies to build a strong position in the energy field. Grand Central Rocket Co., as a developer and producer of solid propellants and solid rocket motors, is a vital part of this plan.

It is our goal to make Grand Central Rocket, under new and aggressive management and with the addition of major facilities, one of the strongest and most capable solid propellant rocket organizations in the country.

J. J. King

JOE J. KING
Chairman of the Board
Grand Central Rocket Co.

(If you have the qualifications that a fast-moving space propulsion team needs, contact our Director, Personnel. Openings now for chemists and engineers.)

**Grand Central
Rocket Co.**

P. O. Box 111
REDLANDS, CALIFORNIA



Mercury



The Dart



Explorer III and IV



Far Side



Vanguard



Nike-Zeus



Test Sled

Gaining ground in propulsion . . .

ultraviolet lamp on his wife?")

"On the other hand," maintained Lt. Bruce W. Pinc of AF Ballistic Missile Division, "We can't have this highly-trained man abort a mission simply because he has a middle-ear block from a cold which he picked up from his wife six days ago and didn't detect until the morning of launch."

• **Propulsion**—In the realm of propulsion, the meeting heard a profusion of highly-technical papers on all types of systems and problems.

Ramjet engines were viewed as an excellent answer to hypersonic flight, even though many obstacles must be overcome in their development. Better ramjet performance was predicted as Mach numbers go up.

The principal problem, that of temperature, was graphically stated when Richard J. Weber of NASA pointed out that the stagnation temperature at Mach 8 is 4500°F, or nearly half the surface temperature of the sun. Neither stainless steel nor such other currently available materials as molybdenum or ceramics can retain adequate strength at such temperatures.

Design techniques can, however, limit the structural temperatures to values that can be withstood by currently-available materials. Both regeneratively cooled ramjets and thermal-radiating ramjets have been considered for the dissipation of heat. The difficulty with the former is the larger amount of surface that must be regeneratively cooled, and the principal

problem with the latter system is design of engine components, nacelles, etc.

The solid-propellant ducted rocket, basically a solid-propellant gas generator exhausting a fuel-rich gas into the combustion chamber of a ramjet, where it is further burned and exhausted, is also in search of heat-resistant materials. But it is considered profitably usable on a great many vehicles operating within the atmosphere.

The principal advantage would be the ability to achieve greater burning times than pure rockets, with low cost. In addition, high total impulse to gross weight makes the system attractive as a large ballistic missile booster. Also cited were its simplicity, reliability and high performance.

• **Ion outlook**—Tests of first-generation ion engines have shown that a number of engineering and scientific problems must be solved before these high-performance, low-thrust devices can be extensively used in space flight. According to Rocketdyne engineers, analysis has demonstrated that improvements in both the power-source-conversion and ion-source-accelerator systems must await development of scientific data not now available.

The accelerations produced by these first-generation ion engines will likely be less than 10^{-4} g, but they are advanced as useful engines for long missions, and some not-so-long missions. The coasting time of a chemical rocket to the nearest planet is about

one year, and the low-thrust but long duration ion rocket could make the trip in the same time.

However, a paper presented by engineers at Electro-Optical Systems Inc. cited problems—electrode destruction, ionizing-surface poisoning, insulating failure and loss of electrical power due to electron feedback—that must be solved before ion propulsion comes into its own.

Some of the difficulties encountered in ion propulsion have been circumvented by extracting ions from the ion source at high voltage, then decelerating them to the desired lower voltage according to ABMA scientists writing on the subject. This method would avoid increasing weight, volume and complexity.

Materials problems were the principal item of interest at most propulsion discussions, mostly involving the temperature and structure-strength characteristics of currently available and newer materials now under development and study.

• **APU picture**—Auxiliary power systems for space vehicles were most considered as eventually evolving in two types, solar and nuclear. Included in a survey of feasible APU systems were: silicon photovoltaic cells ("standard power system in 10 W-500 W range"); solar thermo-electric ("promising"); solar thermionic-diode ("very promising"); solar fuel cell ("promising high efficiency, much development required"); and solar turbo alternator ("very attractive about 3 KW. Need to prove 6000-hour bearing life").


Nuclear power sources numbered four in the survey by JPL's Robert C. Hamilton: radioisotope thermoelectric or thermionic diode ("attractive in 10 W-100 W range. More costly than solar power. Hazards."); reactor thermo-electric ("promising above 3 KW. Depends on materials research"); reactor thermionic-diode ("very promising. Cesium plasma research promising. Multiple staging later"); reactor turbo-alternator ("very attractive above 3 KW. Need to achieve 6000-hour bearing life.")

Other sessions of great interest included guidance systems, high-energy liquid rockets, high-performance propellants and vehicle program reports. These, however, were classified.


Tours arranged for members attending the meeting included visits to the *Polaris* underwater jury rig firer, Convair-Astronautics, and a trip on a missile ship with firings at sea.

Almost 60 exhibitors set up booths at the meeting, and a glance at the list showed a sizable majority of Western representation, but a relatively high percentage of firms from the Eastern Coast.

The Reliable Mace

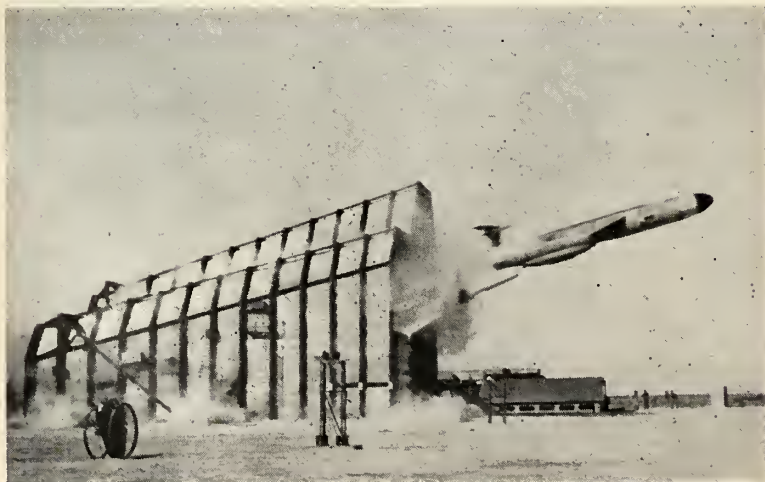


USAF TM-76 Martin Mace is launched from "simulated shelter" in recent New Mexico test. The bird has been termed the "most reliable" and "least complex" in the U.S. inventory by Maj. Gen. Daniel W. Jenkins of the Air Force's Tactical Air Command.

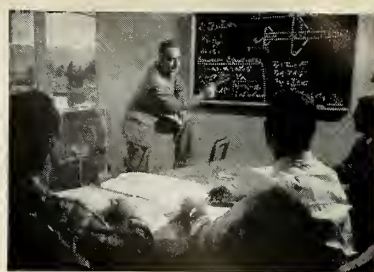

Boeing engineers work in small groups. Ability and initiative get plenty of visibility.



Test of ballistic missile propulsion system. Other tests cover space vehicle control units.

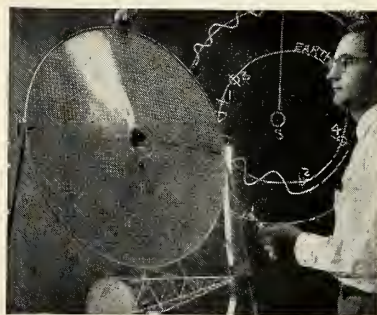

1/20th scale model of unmanned Martian reconnaissance vehicle, a Boeing study project.

Environment for Dynamic Career Growth for Engineers and Scientists

Ability is important in getting ahead in engineering and science. But of almost equal importance is the environment in which you work. A dynamic environment that provides challenge and scope, unexcelled facilities, and plenty of room at the top, can accelerate your advance to higher levels of responsibility and income.

This is the kind of environment you'll find at Boeing... pictured and described in Boeing's new 24-page booklet, "Environment for Dynamic Career Growth."

The booklet, in addition, reports on engineering and science assignments in connection with current Boeing projects—from advanced military and commercial jet aircraft to space vehicles, guided missiles and intercontinental ballistic missiles. It also outlines Boeing research and development activities, and documents the dynamic Boeing environment that fosters career growth of engineers and scientists.

There are openings at Boeing, now, for engineers and scientists of all categories, all experience and educational levels. A Boeing assignment in Research, Design, Production or Service could be the answer to *your* future.



Mr. Stanley M. Little
Boeing Airplane Company
P. O. Box 3822 - MIC
Seattle 24, Washington

Please send me a free copy of "Environment for Dynamic Career Growth."

Name.....

Address..... City..... State.....

Degree(s).....

Field of Interest.....

NEW PROGRAM

Raytheon enters new weapons systems program and offers advancement opportunities for both Junior and Senior electronics engineers with experience in the following fields:

- Microwave engineers—component and antenna design
- Communications systems
- Guidance systems
- Computer systems
- Radar systems
- Inertial reference systems
- Feed-back control
- Auto-pilot
- Ground support
- Electronic packaging engineers
- Radar systems engineers (project management)
- Electromechanical engineer for missile control and auto-pilot design (project management)
- Mechanical engineer experienced in ground handling of large missile systems (project management)

*Please forward
resume to:*

*Mr. W. F. O'Melia
Employment Manager
Raytheon Manufacturing Co.
Bedford, Mass.*

or call collect:

*Crestview 4-7100
Extension 473*

You and your family will enjoy the many advantages of living in the metropolitan Boston area. Relocation assistance and modern benefits.



Prospects for Thermoelectricity

Heavy investment in research gives hope for long-lived power units for space application

by Hal Gettings

WASHINGTON—Widely hailed as the first evidence that practical power generation could be achieved by thermoelectricity, the SNAP III generator demonstrated before President Eisenhower in January was indeed a significant development. Developed under the AEC's SNAP (Systems for Nuclear Auxiliary Power) program, this first unit offers hope that small electrical sources can operate in space for long periods with no maintenance or recharging.

The need for such units is obvious. Considered only in the light of military application, thermoelectric generation fills many desirable requirements: (1) Units with greater efficiency than present powerplants for shipboard and base production of electrical power. (2) Units free from the noise of internal combustion engine parts.

(3) Small power units with high efficiency and small maintenance requirements.

(4) Small power units for satellites and spacecraft capable of using nuclear energy and solar radiation.

(5) Power units adapted to use non-conventional sources of energy such as nuclear energy, solar radiation, and waste sources of all types.

• **Operating principles**—The basic principle of the thermoelectric generator is deceptively simple: if the junctions of two dissimilar metals in a closed circuit are at different temperatures, a current will be generated in the circuit.

This principle was first stated by Thomas J. Seebeck, a German physicist, over 125 years ago. In 1834, Jean Peltier restated it in reverse: a current through the junction of two dissimilar metals causes heat to be absorbed or given off. This is the "Peltier effect" and is the basis of electronic refrigeration.


Neither Seebeck nor Peltier really understood what he had found, however, and except for Lord Kelvin's proof by the principles of thermodynamic theory, nothing much was done for almost 100 years.

The diagram shows a basic thermoelectric circuit. To understand the principle even more clearly, one could imagine a box partially and uniformly filled with electrons. If one end of the box is heated and the other kept cool, the electrons at the warm end move around more and push toward the cold end. So long as new electrons are added (from the other member of the junction) and an electrical load draws off the excess that tends to pile up at the cold end, the current continues to flow. Heat is "pushing" the electricity. (By considering that the electrons carry some of this heat, a picture of Peltier

heating and cooling can also be developed.)

• **Commercial application**—The Russians have been given much credit for their early application of the Seebeck principle. They developed a kerosene-powered generator for home radios, which received much publicity, and have also successfully applied Peltier cooling.

The first commercial application of thermoelectric power generation in this country was in the early 1950's and resulted from the experiments of Dr. S. Karrer, then director of research of the Baltimore Gas and Electric Co. Dr.

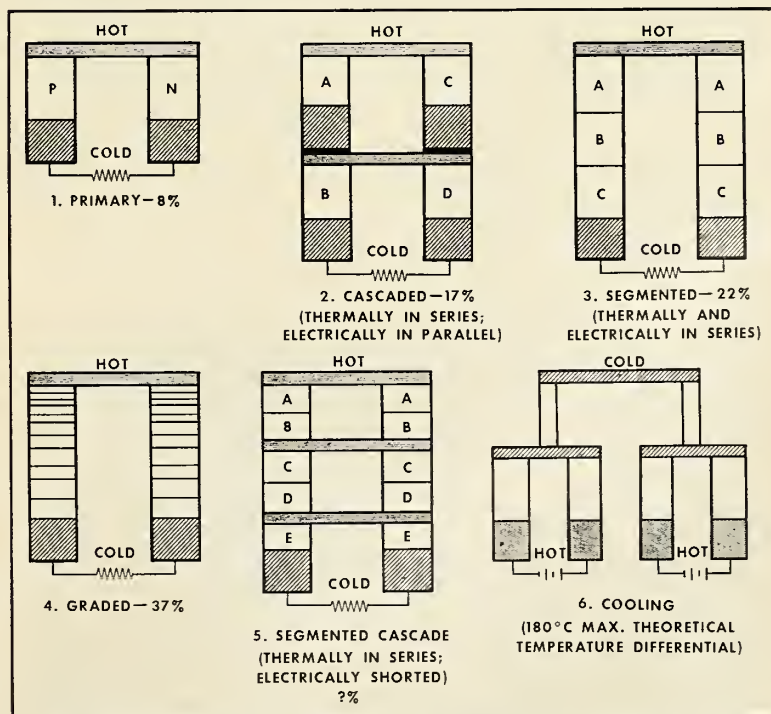

BASIC CONFIGURATIONS of thermoelectric generators. First three types in working and experimental stages. Graded (Type 4) requires development of technique to produce semimetal with linearly varying amount of impurities (from .0001 to .01%, for example) throughout length of material. Relative maximum efficiency figures based on given temperature differential.

Karrer later organized a research department at Baso Inc. and this group developed a doped lead-telluride junction that was capable of generating 10 times more power than the bimetal thermocouples. This binary compound exhibited the high thermoelectric power, low electrical resistivity, and low thermal conductivity requisite for an efficient conversion.

This device was successfully incorporated in heat-powered control valves for gas heating systems. Power generated by the thermocouple in the gas pilot flame electrically held open the main gas valve and provided fail-safe operation. (If the pilot went out the main valve closed and would not answer thermostat control.) The Baso valve is used today in practically every gas furnace and hot water heater.


The Baso research team, under Dr. R. W. Fritts, later moved to Minnesota Mining and Manufacturing Co. Here they applied the same basic device to the SNAP III generator; except now they used the natural decay heat of radioisotopes as a heat source instead of a gas flame.

When Martin, the prime contractor, ordered the thermoelectric generator for SNAP III from 3M—on a purchase order; not a research and development contract—it was practically an off-the-shelf item based on the previous eight years of development. Every issued or pending patent pertaining to the design and construction of the thermopile is today in the name of 3M.

Many companies—at last count, 837—are presently involved in thermoelectric research. All work for the armed forces is coordinated by the Navy's Bureau of Ships, a strangely reticent group which apparently makes a concerted effort to keep its name out of the public press. Whether BuShips is merely modest or is intent on developing their own in-house capability is not known. They have, however, a large and responsible part in thermoelectric progress and certainly deserve considerable credit for their work. They oversee today some \$3 million in research and development contracts. Budget for FY 1960 is reported to be around \$6 million with increasing amounts in following years.

•**Nuclear power application**—The SNAP III unit—two of which have been built—uses 1700 curies (0.38 gram) of polonium-210 to deliver 3.3 watts of electricity. The four-pound unit has an efficiency figure of 5.5% and can deliver about 10 kilowatt-hours over a period of 280 days.

Although this efficiency figure was considered fantastically high a short time ago, efficiencies of 18% are now reported possible within the present state of the art. Unless available money

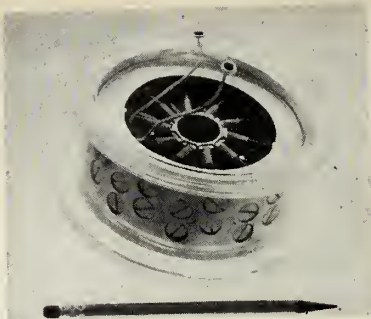

MODEL OF THE SNAP III device, the heart of which is a thermoelectric generator designed and built for the Atomic Energy Commission by the Minnesota Mining & Manufacturing Company.

is wisely used in development, however, it may be several years before a working application with this efficiency is realized. According to Dr. Clarence Zener of Westinghouse, figures as high as 35% may be attained in the foreseeable future. Only two years ago no one had exceeded 1%.

•**Materials development**—Although the doped lead-telluride thermocouple was developed many years ago and has proved itself capable of efficient application, a large percentage of BuShips research and development money is going into materials research. The number of possible binary (and ternary) semi-metal combinations is practically unlimited, and a program to investigate every combination could assume fantastic proportions. Present methods require about a week per sample to merely screen each material. Thorough evaluation, which must come later, will require many weeks for each sample.

Presently, money is allocated roughly on the following basis:

Materials, 50%; devices, 40%; generators and radiators, 7%; servo controls, 2%; and services, 1%.

The attention given thermoelectric materials is, of course, demanded by their importance. Other aspects of the problems must also be considered, however, in designing a workable system.

Since the possible compounds that might be explored are almost limitless, there is a pressing need for criteria to predict the more promising materials.

In evaluating a thermoelectric material, three properties are of particular concern: Seebeck coefficient, electrical resistivity, and thermal conductivity. The relative importance of these properties varies with the application.

Of the various parameters involved in materials evaluation, thermal conductivity gets the most attention since it is least susceptible to modification. For this reason it serves as a valid basis for screening in a materials sur-

vey. A major problem here, however, is that measurements of thermal conductivity are extremely difficult to make.

The basic properties have been expressed in a relationship to provide a "figure of merit" (Z) for use as a yardstick in preliminary evaluation:

$$Z = \frac{S^2 p}{K}$$

S = Seebeck coefficient

p = specific electrical conductivity

K = specific thermal conductivity

The figure of merit thus provides a basis for relative comparisons of the materials under study. To the present a figure slightly in excess of 2.5×10^{-6} per degree Centigrade is the best that has been obtained for a single material in commercial quantities.

Some of the best representative material combinations developed to date and their figures of merit, are bismuth telluride (2.8×10^{-3}), lead telluride (1.8×10^{-3}), and germanium-telluride (1.1×10^{-3}). Near-future goals are for figures of 4×10^{-3} . It is generally felt that figures of above 4 will be necessary for commercial application.

•**Government-sponsored research**—Westinghouse is the largest contractor to the Navy under the current program. It currently holds contracts totaling in excess of \$2,000,000, mostly for materials development. They have had and are continuing a company-sponsored research program larger than that for the Government. Much of Westinghouse's materials development started from the work of Dr. Zener (of Zener-diode fame). It was the first to obtain efficiencies of more than 4%.

Government-supported work for the Air Force and Army on generator and radiator systems is being carried on by General Electric's Engineering Lab. A company-underwritten program is in progress at the Knolls Atomic Power Lab. Total GE contracts amount to more than \$200,000.

Servomechanisms Inc. is doing classified materials research work which grew out of previous company projects dealing with high-temperature electronic components. At present, \$100,000 of Navy contracts total about \$100,000.

Naval Research Laboratory provides service for the entire defense program, including a measurements facility just nearing completion. NRL is involved in what is described as "minor" materials effort.

A study of thermoelectricity has been in progress at Battelle Memorial Institute for several years and has included a number of semi-conductor materials. Institute contracts are in excess of \$100,000.

At least 12 other contractors are implementing the Department of Defense program. Several small contr-

missiles and rockets, June 22, 1959

ve recently been let. These are relatively small, mostly around \$100,000, and concern materials development only.

The entire SNAP program is under the Atomic Energy Commission and only a part relates to the thermoelectric development. The only other project publicized to date is the development of a "plasma thermocouple" which uses cesium gas as one of the metallic thermoelement elements. This unit produced 13 volts for almost 12 hours before it was shut down. Heat was provided by enriched radium.

The AEC provides substantial support on fundamental work on material and devices. They recently began operations at a new \$2.2 million fission products plant at Oak Ridge to separate isotopes from reactor fuel wastes. One of the important uses of these recovered isotopes will be as heat sources for thermoelectric generators. One of the isotopes, cerium-144, is of particular interest for the SNAP project. Even strontium-90 is being used.

•Industry-sponsored programs—Company-supported work in thermoelectricity is about equal to the present government program. It includes several major efforts as well as numerous small projects.

One of the major research efforts in materials is carried on by Merck and Co., which has a pilot plant operation with a capability of about 50 kg of bismuth telluride per month. Merck is under development processes for large-scale production of lead telluride, lead selenide, alloys of these two compounds and ternary alloys of bismuth telluride. Fundamental research is being done on new compositions to achieve substantial improvement in the figure of merit. They reportedly are working on an unspecified material which it is hoped may reach a figure of merit of 4 or better.

As mentioned earlier, Minnesota Mining and Mfg. Co. has been active in thermoelectric material development since 1950. 3M's work covers a wide range of research from theoretical treatment of thermoelectric phenomena to the design of working, commercially applicable generators.

Both RCA and Whirlpool are working on Peltier refrigeration materials. RCA was the first to produce a full-size thermoelectric refrigerator.

Other companies active in the field include Nortronics, Texas Instruments, Curtiss-Wright, Franklin Institute, General Atomic and National Carbon.

•Future research—The future program includes five main areas of research. The first of these is materials and includes high-temperature materials, liquids, and films.

The second deals with the behavior

of materials under severe environments—radiation, thermal and mechanical shock, and chemical atmospheres.

The third area has to do with design and fabrication principles of hardware: contact problems, cascading, structures optimization, heat transfer, encapsulation and loading.

The fourth and fifth areas concern performance characteristics and physical-chemical phenomena.

Westinghouse has just completed a 100-watt generator for ARDC, called the TAP-100 (Terrestrial Auxiliary Power). This unit uses gas for fuel and is claimed to have an efficiency of about 8%. The thermoelectric material is a combination of semiconductors in cascade, also developed by Westinghouse. An advanced version being built will use a nuclear isotope source for heat.

Two contracts have recently been let for oil-fired 5 kw generators. The guaranteed efficiencies of these units, however, should be no more than 6.4%, a figure well below the present state of the art which would allow efficiencies up to about 18%. Requirements for 500kw generators are now in preparation.

The Atomic Energy Commission is continuing with work on both isotope and reactor-heated generators.

Considering these facts, it seems logical to say that the potentialities of thermoelectric power generation (and refrigeration) are just beginning to be explored. The first giant steps have already been taken with practical versions of small generators and cooling units. Larger units can be foreseen in the near future.

With purposeful direction and adequate financing, the next year or two


could certainly yield significant advancements to make possible early practical nuclear-powered thermoelectric generators for space vehicles and more mundane applications. Conceivably, a generator sufficient to power the plasma propulsion engine for interplanetary travel (M/R June 8) could be built within the next few years.

Thermoelectrics face severe competition, however, from several other exotic power sources which have come to the fore very recently. Solar cells are being continually improved and show promise for many space applications. Solar energy may, of course, be directly converted to electrical power through solar cells or used to furnish heat to a thermoelectric generator.

Electrostatic generation, although 300 years old, has been proposed as an efficient source for high-power applications in the vacuum and weightlessness of outer space.

Fuel cells which produce electricity directly from hydrogen and oxygen, such as the one recently announced by General Electric (M/R, June 8) are predicted to have a very bright future. Yale and Towne has announced plans for a cell within one or two years capable of powering a lift truck. A proposed sodium-mercury fuel cell would reportedly have fantastic potential.

It is impossible to say which of these possibilities, or even as-yet-unknown ones, will emerge as the most universal of tomorrow's power sources. It is fairly certain, though, that we may expect revolutionary progress in the near future. With the impetus of space program requirements and the broad interest of industry in the problem, the next few years may yield tremendous advancement.

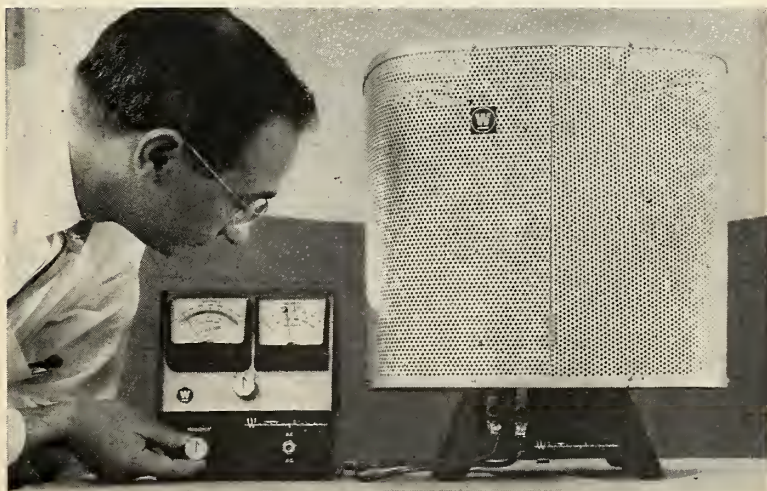

TAP-100 built by Westinghouse is ten times larger than any similar thermoelectric device to date, and produces 100 watts.



NEW—the world's biggest filament-wound fiberglass radome!

Here it is — twelve feet high, four feet in diameter — the largest filament-wound fiberglass radome ever made. This huge form was produced by a special winding process—product of Kidde engineering knowledge and research — which results in an extremely high strength-to-weight ratio, plus a maximum in physical and electrical uniformity. Furthermore, this Kidde continuous-winding process, plastic reinforced by fiberglass, permits the construction of fiberglass shapes and forms which were either difficult or impossible to fabricate by previous methods.

Walter Kidde & Company has available complete facilities and personnel for the development, testing and production of fiberglass forms. If you have a problem in this area — write Kidde today. We've solved some pretty tough ones in the last thirty years!

Walter Kidde & Company, Inc., Aviation Division
620 Main Street, Belleville 9, N. J.




District Sales Engineering Offices: Dallas, Tex.
 Dayton, Ohio—St. Louis, Mo.—San Diego, Calif.
 Seattle, Wash.—Van Nuys, Calif.—Washington, D. C.

Walter Kidde-Pacific, Van Nuys, California
 Walter Kidde & Company of Canada Ltd.
 Montreal—Toronto—Vancouver

**FIBERGLASS FORMS
 ARE A
 KIDDE SPECIALTY!**



Thanks to Kidde's continuous winding process, a new field of fiberglass forms is now open to aviation engineers. Structural tubing, pressure vessels can now be made stronger than steel with half its weight!



For the engineer interested in the field of pneumatics, filament wound fiberglass spheres offer the solution to many problems. Available in capacities of from 50 to 2500 cubic inches the spheres can withstand pressures up to 5000 psi.



Missile rocket motor cases, turbo-propeller bodies and missile radomes are but a few of the forms which Kidde can fabricate from high strength, low-weight fiberglass capable of withstanding temperatures as high as 1000°F. for short periods of time.

missiles and rockets, June 22, 1954

Successful AME Is Unveiled

Page Communications' gear tested in North Atlantic is expected to find more use on ionoscatter circuits and offers potential for increased channel capacity

by Charles D. LaFond


WASHINGTON—Three years in development, a new and highly successful anti-multipath equipment (AME) providing a significant increase in telecommunications reliability has been revealed here by Page Communications Engineers, Inc., a subsidiary of the Orthrop Corporation.

The equipment essentially employs frequency translation technique at both the transmitting and receiving ends. Following long tests on northern operational ionospheric-scatter communication circuits of the U.S. Air Force, circuit outage resulting from ground-scatter multipath has been reduced from a recorded high of 27% to a maximum of 2½% of total operating time.

The North Atlantic Ionospheric Scatter System in which AME has been employed is the first operational system built for the Air Force to use this propagational mode. A part of the global defense communication system, it stretches from Wachusett, Mass., to Goose Bay, Labrador; Sondrestrom and Thule, Greenland; Iceland, and England.

With a few changes in stations, the system has been in operation (including its initial test period) since 1954. Reliability has been very high and, based on this successful operation, many thousands of miles of additional defense scatter circuits have been or will be constructed. It is expected, that AME will be employed in the near future on other similar ionoscatter circuits.

• **History**—When the early VHF ionoscatter circuits were placed in operation, there existed a period of decreasing solar activity. Long-delay multipath as a result of ground scatter, propagated by the F-layer during daylight hours, was low. That multipath would increase with high solar activity was recognized, but its effect on re-

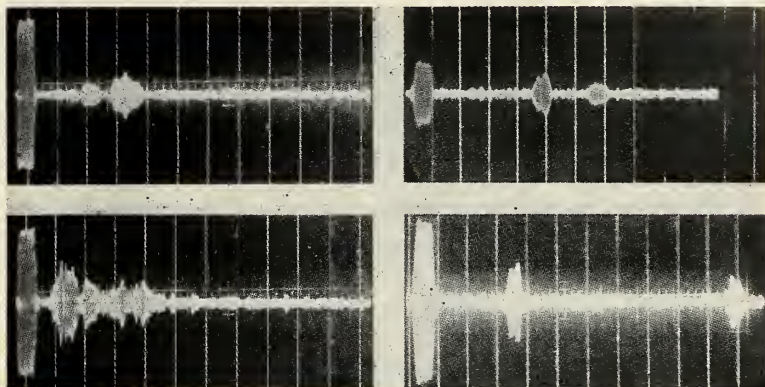

Frequently Observed Rarely Observed
PHOTOGRAPHIC examples of ground-scatter multipath propagated by the F-Layer back-scatter multipath. To determine delays, a 6.6-millisecond pulse was transmitted with 10-millisecond timing markers.

liability was underestimated. By November, 1955, solar activity had increased, the resulting sun-spot numbers had almost trebled, and multipath seriously affected operational performance.

It was at this time that the occurrence of long-delay multipath was observed on the North Atlantic ionoscatter circuits. Delays of the order of 50 milliseconds (msec) were encountered during daylight hours, severely impairing radio teleprinter operations and, at times, making operation impossible. To reduce this performance degradation, Page conceived a practical program for an experimental anti-multipath equipment and began its long development.

By the spring of 1957, prototype models built by Rixon Electronics, Inc., of Silver Spring, Md., were ready and installed in a few of the northern scatter stations. Tests were continued through the fall of 1957 and subsequently modified equipment (by then installed in five stations) provided substantial reduction in circuit outages due to ground-scatter multipath.

A considerable amount of data was gathered during these preliminary tests. Delay data were obtained on these circuits while operating on a frequency of the order of 35 mc/s, with a transmitted pulse of approximately 6.7 msec. Ten msec markers were employed to determine the delays.

The ground-scatter multipath propagated by the F-layer was characterized by relatively long delays. Multiple echoes occurred in many instances—the majority arriving with delays in the range of from 10 to 50 msec. Occasional delays as long as 100 msec were observed. With the insertion of AME in the system, multipath interference was all but eliminated.

It was determined that an anti-multipath equipment providing protection for delays ranging from approximately 10 to 50 msec would be expected to give satisfactory performance.

• **Design criteria**—The character of multipath is such that to use frequency translation, the rate must be chosen so as to effect the first translation before

Computability and security . . .

the arrival of shorter delay multipath. Also, the first translation frequency cannot be reused until the more serious multipath echoes have subsided.

This implies that for longer bit widths such as 5 to 10 msec, the translation had to occur once for every bit. For shorter bits the translation could be made to occur for any whole number of bits, as long as the sum of the widths does not exceed approximately 10 to 50 msec.

Multipath discrimination is a function of the magnitude of the frequency shift and skirt selectivity of the associated FSK (frequency shift) receiver. The receiver type in use on the systems under consideration, is a dual filter type and is known as the FSK-2. The skirt selectivity of the receiver is such that when using a frequency shift of 800 cps the discrimination against an echo arriving with a delay of 6.66 to 46.6 msec is from 12 to 60 db.

• **Description of AME**—AME as installed on the North Atlantic scatter system avoids receiving delayed multipath signals by means of a sequence of frequency translations. Immediately after the reception of each information bit, the transmitter and receiver are shifted synchronously from one frequency to the next. With the receiver lagging the transmitter by a time interval equal to the sum of the propagational and certain inherent equipment delays, the equipment operates in such a manner that the receiver and transmitter are not returned to any previously used frequency until approximately 46 msec have elapsed.

By this means, multipath signals arriving with delays longer than the time required for one frequency translation cycle, or arriving at a time less than the total time period required for one complete sequence of frequencies, will be off-frequency with respect to the receiver and will be attenuated in accordance with the receiver selectivity characteristics.

The equipment satisfactorily attenuates multipath components by shifting in 800-cps increments and employing seven different frequencies for mark and space. Beginning at the normal operating frequency, a shift of 800-cps is made, followed by successive shifts to 1600 and 2400 cps above the operating frequency. At this point a negative translation is made to 2400 cps below normal operating frequency, followed by successive shifts upward to 1600 and 800 cps below the normal operating frequency.

When used in a typical ionosscatter system, the transmitting AME is inserted between the output of the frequency multiplier and the input of the exciter combiner.

The signal input to the transmitting AME is the normal FSK-2 signal, while the output is translated over seven frequencies for mark and seven frequencies for space. Thus the output signal may appear on any of 14 frequencies, but only one frequency is transmitted at any one time.

The receiving AME is inserted between the output of the FSK-2 r-f amplifier and the input to the converter panel. The receiving translation is accomplished in a manner such that the signal applied to the converter now approximates the original FSK signal with the multipath echoes appearing off-frequency. The F-layer propagated multipath is attenuated by the selectivity of the mark-space filters of the FSK-2 receiver.

The rate at which the frequency

translation occurs is determined by timing of the multiplex equipment. (When operating with the AN/FGC multiplex, the frequency translation occurs once for each transmitted and is coincident with the mark-space transition.) Since the FSK-2 receiver normally is operated in dual space diversity, it is necessary to provide AME with an additional set of mixers and an i-f amplifier.


• **Cryptographic compatibility**—The experimental AME will operate with encrypting systems compatible with the multiplex equipment now in use on the scatter circuits. The equipment installed in the North Atlantic area has been handling routine encrypted traffic with satisfactory performance. The equipment also will handle synchronous cryptographic systems having a mark-space output and a discrete modulation rate not exceeding 600 bits/sec and with a minimum mark-space transition rate of approximately 30 bits/sec.

• **Transmission security**—Page has indicated that AME has a degree of inherent transmission security. Since additional operations are performed on modulation at the transmitting end, these operations must be demodulated at the receiving end. For secure transmission, the number of frequency steps can be increased in the translation program in a random manner but with a known key.

Attempts to jam such a system would require an increased bandwidth with the resulting increase in power to the jamming transmitter. An improvement in transmission security would thus be obtained, but additional frequency spectra would be required.

• **Performance**—During January 1958, traffic averages on the north circuits due to ground-scatter multipath ranged from about 15% to as high as 27% of the total operating time with almost all averages occurring during the daylight hours. During February and March 1958 operation, following the installation of the experimental AME, circuit averages ranged from 0.1% to a max of 2.5% of the total time. This improved performance includes time for multipath recognition and time to place the equipment in operation. An appreciable portion of this outage time was due to interference. (Improved FSK-2 channel filters and additional personnel are expected to produce a further reduction in outage time.) Loss in signal detectability when using AME was measured and found to be approximately 1 db.

• **Meteoric and auroral multipath**—The instrumentation required for measurement of ground-scatter multipath delays also permitted observation of meteoric multipath. A 400-μsec pulse was transmitted and a total

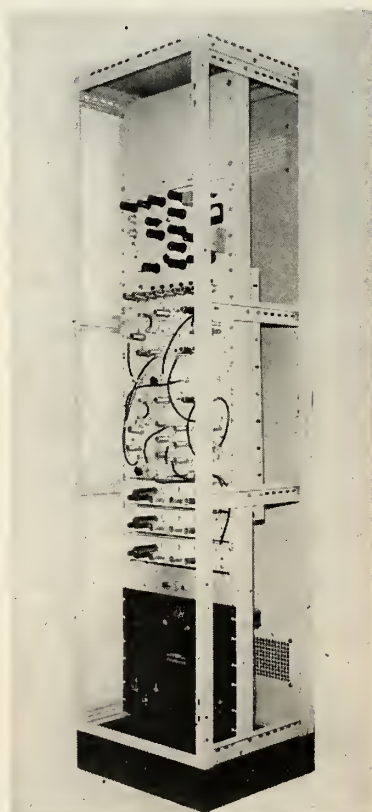

PROTOTYPE model of Page's rack-mounted experimental Anti-Multipath Equipment Built by Rixon Electronics, Inc.

536 meteoric-multipath observations was made during April, 1958. The majority of meteoric multipath delays ranged from 100 to 300 μ sec with the delays occurring up to approximately 1000 μ sec.

During the above tests, a brief period of auroral disturbance was encountered, and limited data were obtained. This type of multipath is characterized by an exponential decay over a relatively long period. From the distribution of the observed auroral multipath, the predominant delays were less than approximately 1 msec, but continuous echoes ranging from possibly 100 msec to over 4 msec in length were observed.


• **High-speed operation**—The constantly increasing volume of commercial and military traffic is requiring a continual increase in the number of traffic channels. If additional teleprinter channels are to be provided by time-division multiplex equipment, the bit length becomes progressively smaller.

With newer 16-channel multiplex operating at 100 words per minute, the bit length is 1 msec. Such high-speed transmission would be expected to resist a moderately high error liability due to meteoric and auroral multipath. From the limited data obtained, it appears that satisfactory high-speed operation of AME may be possible by providing a minimum delay protection equal to the delay of a single bit and a maximum delay protection approximating 5 msec.


Synchronous transmission at high speeds with low error rates on ionospheric scatter has been limited in the past by problems of decision ambiguity; filtering, diversity combination, multipath and timing errors. Experiments recently conducted using improved diversity and decision techniques together with the AME appeared to provide at least partial solutions for all except the timing problem.

The development of AME together with advances in diversity and decision techniques offers the potential for increasing channel capacity of present scatter circuits.


• **High frequency tests**—In June, 1958, under contract with National Bureau of Standards, Boulder, Colo., a test program was initiated to determine the effects of an experimental AME for reducing teleprinter errors from multipath propagation on an existing high-frequency radio circuit. AME was shown to provide an appreciable reduction in multipath errors. Test results were similar to those obtained on ionoscatter circuits. A 2-10 fold reduction in errors were consistently observed, while the average reduction in error rate was approximately

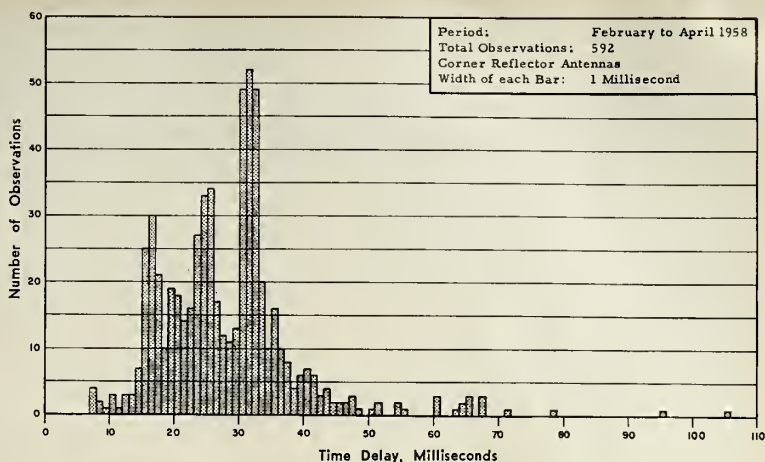

Distribution of F_2 Multipath Delays.

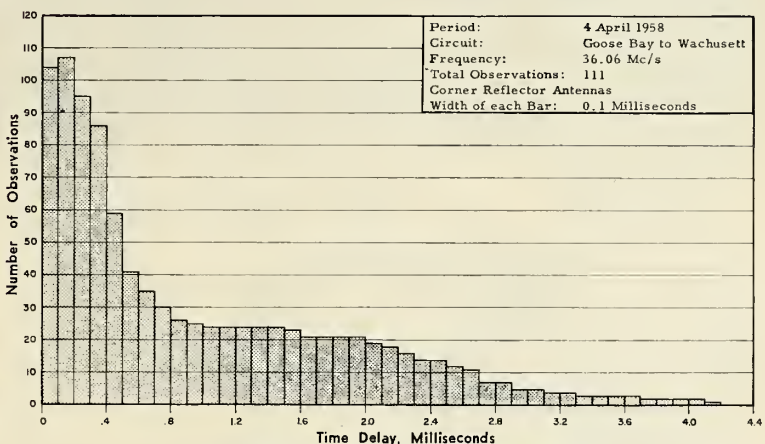

Distribution of Auroral Multipath Echoes.

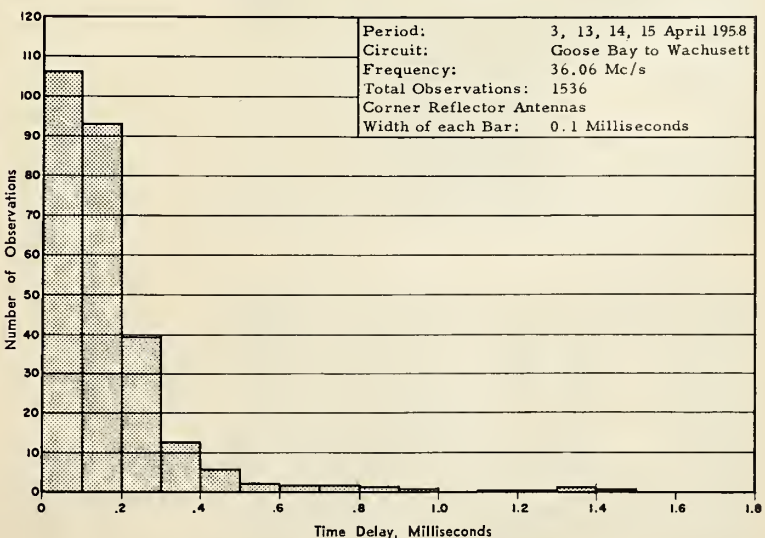

Distribution of Meteoric Multipath Echoes.

Temco

AIRCRAFT
DALLAS



NAVAL AVIATION MAKES HISTORY

with ALL-JET TRAINING



NAVCAD Earland R. Clark of Stroudsburg, Pa., receiving congratulations from Rear Admiral Joseph M. Carson, Chief of Naval Air Basic Training.

On March 13 at the Naval Air Basic Training Center, Saufley Field, Pensacola, Florida, the first student pilot in Naval Aviation history soloed a primary jet aircraft—without previous propeller-driven aircraft experience. The flight was made in a TT-1 "Pinto"—designed specifically by Temco for all-jet training.

The first primary jet trainer ever purchased by any of the U. S. military services, the Pinto is designed for today's jet age. It is built closely along the lines of high-performance jet fighter aircraft and gives the student pilot the "feel" of jet training from the very beginning.

With its high safety standards, fine handling characteristics, optimum maintenance provisions and overall reliability, the Pinto is an ideal primary jet trainer. From initial cost to operation and maintenance, it is designed to provide better pilots at less cost, in less time. All in all, it gives the Navy a decided edge in the ever-advancing pace of military jet aviation.



SYSTEMS MANAGEMENT

DEVELOPMENT

DIRECTED RESEARCH

PRODUCTION

New 4000° Range for Pyrometers

WASHINGTON—Many of the questions arising in high-temperature standardization, calibration, use, and manufacture of optical pyrometers were discussed at the recent National Bureau of Standards symposium on high-temperature pyrometry. Principal subject at the meeting was the possible use of the temperature scale beyond 4000°K.

In the last few years, the interest in high-temperature measurements has created a demand for optical pyrometers capable of greater precision and accuracy. Recent studies, principally at the National Bureau of Standards and Argonne National Laboratory, the symposium sponsor, have shed new light on some of these problems.

Trends in the NBS work on optical pyrometry were outlined at the beginning of the conference by Dr. C. M. Herzfeld, chief of the bureau's Heat Division. He pointed out the necessity of improving methods of temperature measurement in the range 800°C to 4000°C under ideal conditions. Here, accuracy, precision, and convenience of operation need further improvement.

An extension of methods for measuring temperatures under ideal or approximately ideal conditions in the range 4000°C to 10,000°C is also required. And improvements in temperature measurement under non-ideal conditions, such as in flames and complicated systems, are needed along with more basic research for new and better ways of measuring temperature.

• **Setting scale**—The procedure used at Argonne to establish the temperature scale in the range of 1000°C to 2000°C was discussed by R. J. Thorn and G. H. Winslow. The starting point was the freezing point of copper, which has been determined as 1083°C on the 148 International Temperature Scale. Above the freezing point of copper a black body constructed of tungsten, contained in a vacuum and heated indirectly, was employed as a light source.

The National Bureau of Standards and Argonne National Laboratory optical pyrometer temperature scales agree within 1°C at the gold point, but differ by 4°C above 1600°C. It was suggested that the most likely source of the difference lies in the effective wire lengths.

• **Limits**—Basic limitations on accuracy of optical pyrometry were discussed by D. R. Lovejoy of the National Research Council of Canada. An

INNER-FIN HEAT EXCHANGER



TYPICAL INNER-FIN HEAT EXCHANGER

provides cooling for missiles

Dunham-Bush Inner-Fin heat exchangers in Electronic Tube Cooling Units have proven the answer to the ever-present space problem in aero-electronic heat transfer.

Inner-fin coils have effected a 60% savings in coil sizes in units. Maintaining the same air and liquid pressure drops through the coil, an Inner-fin coil equivalent in capacity to a standard finned tube coil occupied 60% less space.

Whether your problem is "unusual" or not... whether it's in air conditioning, refrigeration or heating... Dunham-Bush has the products and engineers to meet your needs.

WRITE FOR FREE INNER-FIN BROCHURE

DUNHAM-BUSH

AIR CONDITIONING • REFRIGERATION
HEATING • HEAT TRANSFER

Dunham-Bush, Inc.

WEST HARTFORD 10, • CONNECTICUT, • U. S. A.

SALES OFFICES LOCATED IN PRINCIPAL CITIES



A HIGH POLISH FOR HIGH FLYING

KENNAMETAL* meets many critical requirements

This unretouched photograph shows the high reflective finish of a Librascope† integrator disc, 1½" diameter, made from Kennametal. Little discs like this one are of big importance in the operation of guidance systems, automatic pilots, and gyro stabilizers. In addition to a high polish, the discs must have high YME, hardness, and compressive strength . . . all qualities of Kennametal. Need for these properties, or a combination of other exceptional characteristics, is often met by a specific grade in the Kennametal family of tungsten carbide alloys.


In highly specialized types of photographic equipment, for example, Kennametal optical flats substitute for fragile glass mirrors to overcome distortion due to centrifugal or other forces. Many other vital parts subject to abrasion or corrosion are now being made of Kennametal . . . such parts as high pressure compressor cylinder liners, seal rings for rotary pumps, valve parts, plungers, and bushings.

JUST HOW IS KENNAMETAL SUPERIOR?

- Kennametal has an extremely high YME . . . up to 94 million psi compared to steel's 30 million . . . ranges up to 94.7 Rockwell A.
- Some grades of Kennametal have a density as high as 15.5 gms/cc . . . twice that of heat treated steel . . . while other grades will stand up for days in boiling 5% HNO₃ and 5% H₂SO₄.
- Kentanium,* a series of hard titanium carbide alloys, retains sufficient strength for many applications at temperatures of 2200°F. and above.

Chances are some vital components for your equipment could be made of Kennametal to provide greater reliability, over a wide range of operating conditions, than that provided by conventional materials. A Kennametal Carbide Engineer will gladly discuss your problem with you. Or write us for one or both of these booklets: B-111A—"Characteristics of Kennametal," and B-444A—"Kentanium," KENNAMETAL INC., Dept. MR, Latrobe, Pennsylvania.

*Trademark †Trademark of Librascope, Inc.



INDUSTRY AND
KENNAMETAL
...Partners in Progress

estimate of the errors arising in primary standard pyrometer calibration and in secondary standard strip lamp calibrations agreed with the results of a recent intercomparison of secondary strip lamps. An evaluation of a carbon arc, accepted as a useful secondary standard at 3514°C, showed that this region the effect of the uncertainty in effective wave length exceeds all other sources of error combined.

Even though very precise work was involved in determining the platinum point at 1769°C, metal freezing points seem to offer little advantage over the strip lamp as secondary standards. It was determined that good commercial pyrometers can be calibrated with a precision comparable to that of primary standard pyrometers; the lamp current is calibrated directly rather than through the internal potentiometer and scale.

R. D. Lee of the Bureau discusses the procedures used in calibrating optical pyrometers and tungsten ribbon filament lamps submitted to the Bureau. Temperature comparisons are made with the NBS standard pyrometer from 800°C to 3800°C. In calibrating optical pyrometers, a tungsten ribbon filament lamp is used as the temperature source up to a brightness temperature of about 2400°C, and a zirconium arc and carbon arc to temperatures of 2800°C and 3800°C, respectively. Since the brightness temperature of a non-black body is determined in part by the red filter glass of a pyrometer, corrections are made to test pyrometers with different transmission characteristics.

The estimated uncertainty of calibration below 2800°C is based on experience with a number of instruments rather than on the specific deviation of a given instrument. The standard deviation, with respect to the International Temperature Scale, of pyrometer and strip lamp calibrations is about ±1° from 800°C to 1500°C, ±2° from 1500°C to 2000°C and increases to about ±6° at 2800°C.

• **Photoelectric**—A summary of NBS work on photoelectric pyrometers was given by C. P. Johnson and D. Ermyny. The first model of the NBS photoelectric pyrometer has a sensitivity of 0.1°C at the gold point and a spectral band width of only 100 Å. These features together with its selective character make it an attractive instrument. However, the measurement of brightness temperatures to a precision of 0.1°C introduces many difficult problems involving lens aberration, scattered light diffraction, and stability of light sources. These need to be investigated in great detail before a photoelectric pyrometer can be considered a reliable accurate instrument.

McElroy Hit for Failure To Halt Missile Rivalry

A bitingly critical statement by the U.S. Chamber of Commerce accuses Defense Secretary McElroy of ignoring his power to stop "unhealthy and intolerable" service rivalry over missiles. The Chamber told the Senate Defense Appropriations Subcommittee Congress should force full and prompt use of McElroy's power "to curtail multiple development . . . and to eliminate unnecessary overlapping and duplication in a dozen or more support-type activities."

Without referring to specific cases, the Chamber urged the subcommittee to go along with House cuts in President Eisenhower's budget. Added the business group: "Congress has barely scratched the surface insofar as savings opportunities are concerned."

President Eisenhower has signed a bill increasing the authorization for an AEC "weapons diagnostic" plant at Los Alamos from \$2.2 million to \$3.5 million.

Nike-Hercules missiles have been integrated into the air defense system of U.S. military installations in West Germany.

Snark alert test at Northrop Field, Calif., was well past the half-way mark in a 400-hour continuous 24-hour standby operation last week. Total run will require 17 days.

Scientists Protest Secrecy; Warning Basic Research

Consensus of opinion of 17 Nobel prize-winning scientists is that secrecy in basic research is senseless and harmful, and in many cases causes unnecessary duplication of effort. The views are expressed in letters sent to the Senate Constitutional Rights Subcommittee in response to queries from chairman Thomas C. Hennings, Jr. (D-Mo.). Other points raised by the scientists—physicists, chemists and medical doctors—included:

—the government's "need to know" contract restrictions hinders scientific progress because it is often impossible to prove NTK until it is known "what the other man is doing";

—blanket security classifications often cover areas of a project which in no way touch on the sensitive;

—because many good scientists are kept clear of classified projects under the present set-up, secrecy could become a cloak for mediocrity—morale

is lowered when a scientist is denied the recognition that comes with publication of a discovery.

Hourglass Rocket Chamber

For NASA Solar Aircraft has developed brazed stainless steel rocket thrust chamber, shaped like hourglass. Chamber is cooled regeneratively and is being used to test new propellant combinations at Lewis Research Center, Cleveland. Chamber is formed of 120 U-shaped AM-350 channels .008 inches thick, assembled around a stainless steel mandrel with about 100,000 spot welds and wrapped tightly with .008 inch stainless steel ribbon, which is brazed with copper.

A prototype device to measure amount and temperature of gas in the upper atmosphere has been developed by **Lockheed Aircraft**. The unit, mounted in a satellite, contains a small hole which allows a beam of gas molecules to enter. This beam is chopped by whirling blades and hits a microphone where it produces a tone directly proportional to the density of the gas. In addition, the beam fans out, or spreads, a measurable amount proportional to the temperature of the entering gas. The same technique could, according to Lockheed, be used to provide an input to stabilize the satellite.

Renegotiate Act Extension Approved by Senate Unit

The Senate Finance Committee approved a 30-month extension of the current Renegotiation Act.

The committee's move had the effect of rejecting a House-passed four-year extension of the law. Critics attacked the House bill as a boon to big missile and aircraft manufacturers.

The Democratic Advisory Committee called for spending an extra \$30 billion over the next four years to expand U.S. defenses.

The committee charged U.S. defenses are in disastrous shape compared to Russian military might.

It said one of the first steps needed to improve U.S. defenses is "a crash effort to bridge the missile gap." It called for doubling the production of **Martin Titans** and **Convair Atlases**.

NASA established a committee to study the possibilities of establishing an equatorial launching site for satellites. Dr. John P. Hagen, NASA assistant director, is chairman. (M/R May 18)

French IRBM?

France is trying to develop its own IRBM. A special society called SEREB has been established to do the job in cooperation with French industry.

The Air Research & Development Command announced a twin-rail rocket sled reached a speed of 2,075 miles an hour last month in a test at Edwards AFB, Calif.

ARDC said it believed the speed was a record.


NASA awarded a contract to **Grumman Aircraft Engineering Corp.** to conduct studies for search and recovery operations for Project *Mercury*.

Consideration will be given to recovery by ships, helicopters, airplanes and airships.

March of Progress

Electronic Communications, Inc. has acquired Advanced Technology Corp. of Santa Barbara in exchange for 1,000 shares of ECI common stock. ATC which was formed by a group of research scientists formerly with Aerophysics Development Corp. and Avco will be operated as a wholly owned subsidiary of ECI Inc. J. H. Pomeroy & Co., Inc., engineering and construction firm, has been cited for outstanding support of the Navy's ballistic missile program . . . Aerospace Industries Association (formerly Aircraft Industries Association) has raised the status of its Guided Missile Committee to Guided Missile Council—expanding its functions to include "all types of management interests relating to guided missile manufacture." . . . Aerojet-General Corp. has set up a Space Technology Division which will concentrate on research and development in electrical and other advanced propulsion and space systems. Facilities purchased by the company last month at Downey and Riverside, Calif., will be used to continue product development and to expand its powerplant and systems programs . . . Recent groundbreakings for new computer production facilities were begun by Philco in Montgomery County, Pa., and by Librascope, Inc., at Sonoma, Calif. Philco's multi-million dollar plant, just west of Willow Grove, is scheduled for occupancy in November and will house production facilities for the Transac S-2000 electronic data processing system. Librascope, subsidiary of General Precision Equipment Corp. supplies weapon control systems and computers for anti-submarine warfare.

LOOK TO R/M TO MEET ALL YOUR TEFLON* NEEDS

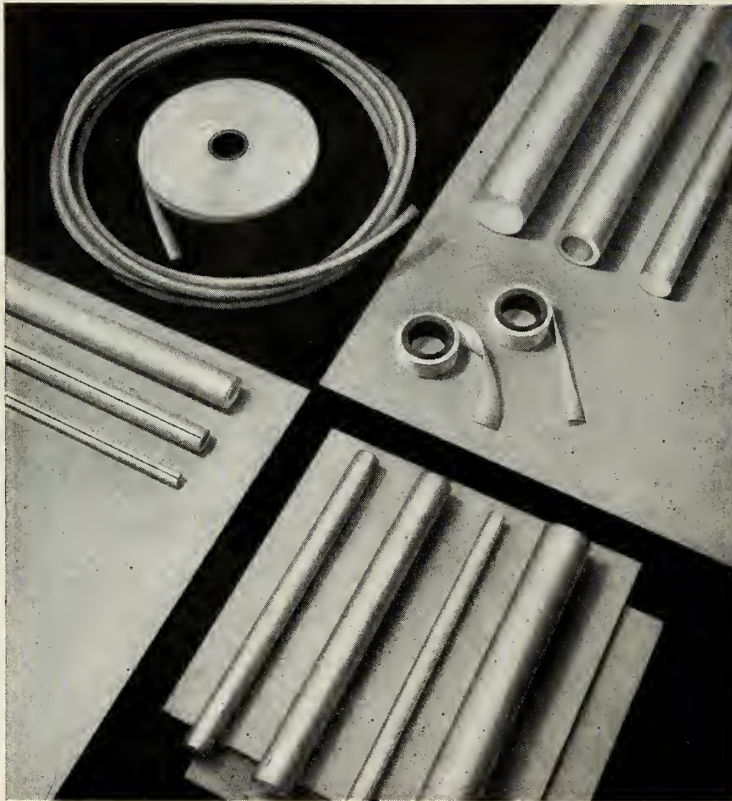

R/M—headquarters for "Teflon" products. R/M can meet all your needs for sheets, rods, tubes, tape, thin-wall tubing (available with permanent color striping for identification purposes) and bondable "Teflon." R/M can also supply molded, machined and extruded "Teflon" made to your exact specifications.

"Teflon's" many remarkable properties have established it as an important material for use in aircraft, missiles and spacecraft. Yet when you select "Teflon" for a particular job, you solve only part of your problem. Equally important is the selection of a source of supply you can depend on for both competent engineering assistance and the production capability needed to meet your exact specifications and quantity requirements. This complete

"Teflon" service is yours from R/M.

A pioneer in "Teflon" application and fabrication research, R/M offers design guidance that can help assure maximum part performance, and its ample production facilities can supply "Teflon" in the form best suited to your needs. Learn more about R/M's complete "Teflon" service—and how it can benefit you—by contacting your nearest R/M district office. Or write Plastic Products Division, Manheim, Pa.

*A Du Pont trademark



RAYBESTOS-MANHATTAN, INC. Engineered Plastics • Asbestos Textiles • Mechanical Packings • Industrial Rubber Sintered Metal Products • Rubber Covered Equipment • Abrasive and Diamond Wheels • Brake Linings Brake Blocks • Clutch Facings • Laundry Pads and Covers • Industrial Adhesives • Bowling Balls

RAYBESTOS-MANHATTAN, INC.

PLASTIC PRODUCTS DIVISION FACTORIES: MANHEIM, PA.; PARAMOUNT, CALIF.

Contact your nearest R/M district office listed below for more information or write to Plastic Products Division, Raybestos-Manhattan, Inc., Manheim, Pa.

BIRMINGHAM 1 • CHICAGO 31 • CLEVELAND 16 • DALLAS 26 • DENVER 16 • DETROIT 2 • HOUSTON 1
LOS ANGELES 58 • MINNEAPOLIS 16 • NEW ORLEANS 17 • PASSAIC • PHILADELPHIA 3
PITTSBURGH 22 • SAN FRANCISCO 5 • SEATTLE 4 • PETERBOROUGH, ONTARIO, CANADA

—moscow briefs—

by Dr. Albert Parry

The building of their first electronic computers is reported by the scientists and engineers of Poland and Rumania. Aid given by Soviet experts is praised. The first Polish computer was made for that country's Hydro-Meteorological Institute. The first Rumanian machine built under the leadership of the staff of the Timisoara (Temesvar) Polytechnic Institute, can make more than 15,000 operations per second in addition and subtraction.

Under the title "Materials of Soviet Rockets," a brief article in Prague monthly magazine *The SNTL Technical Digest* states that "the whole world" is asking these questions: What are the most stressed parts of Soviet rockets made from? What materials are used in the fuel pump nozzles and combustion chambers of the huge engines stressed by temperatures of many thousand degrees and enormous forces? What materials are used for the details of the 300,000 component parts combined into one single interplanetary rocket? The Czechoslovak magazine then proceeds to give this answer:

"No material produced by metallurgical processes hitherto known proved to be satisfactory. In the USSR the production of these materials has been developed on the basis of ultrasonics applied during casting and solidification. The crystallization of a freezing metal begins with the formation of fir-tree shaped skeletons, the so-called dendrites.

"The distribution of the solidified metal around the dendrite axes determines the homogeneity of the structure and thus the quality of the final product. In a melt exposed to vertical ultrasonic vibration and to a horizontal vibration with frequencies 10 times higher, up to 200,000 c/s, the dendrite axes are continuously breaking off, the solidified material acquires a super-fine ordered structure, and a material with remarkable properties is obtained. The solution of the riddle is: while vibrational casting is solved in the USSR at the stage of shop operation, it is not yet solved in the USA."

• Several movies devoted to Soviet advances in rocketry have recently been produced and issued by the Moscow Studio of Scientific Popular Film. Among them is "Four-Legged Astronauts" on the role of dogs in Russian rocket flights. A 20-minute documentary, it includes material not alone on the training of such canines as Lai of *Sputnik II* but also on Soviet experiments with birds and rabbits which preceded the work with dogs. This film

missiles and rockets, June 22, 1958

ased on a scenario by P. Isakov and
rected by N. Tikhonov, with assist-
ce from A. Genin and A. Seriapin,
o of Russia's space-medicine experts.
nother latest Soviet film is "Automats
Cosmos," dealing with automatic
quipment installed on Russian rockets
nt aloft for purposes of research.

This film is notable for a detailed
emonstration of the equipment sent
o in *Sputnik III*. Yet another recent
oscow film is "Mankind's Great Vic-
ry," dedicated to the launching of the
nar rocket *Mechta* or, as it is called
outside the USSR, *Lunik*.

Polaris Data Gathered y Leach Cylinder

COMPTON, CALIF.—A rugged in-
strument cylinder has been developed
the Leach Corp. for use in gather-
g launching data on the *Polaris*.
Mounted in the nose of a dummy
ssile test-launched from submarines
hip simulators, the 176-lb. cylinder
carries 15 pounds of encapsulated in-
struments in a ½" steel shell. It can
withstand complete submersion for two
ys or more and resists water pressure
75 psi.

Instrumentation, claimed to have
withstood more than 1000 g's in the
package, includes a 14-channel re-
order, battery power pack, three ac-
celerometers, two rate gyros, transis-
tized amplifiers, control and calibra-
tion circuits, a static inverter providing
40-cycle power to the gyros, and a
modulator package.

According to Leach engineers,
ven the *Polaris* dummy was test-fired
to a bed of concrete the package
survived the shock with all instru-
ments functioning perfectly, although
the missile itself was damaged.


Silors Study Polaris Sib's Auto-navigator

DOWNY, CALIF.—Selected U.S.
Navy men have begun a 12-week
training course in installation, check-
out, maintenance and operation of the
nautical auto-navigator being produced
by North American Aviation's Auto-
matics Division for *Polaris*-equipped
submarines.

Training specialists of the division's
Military Logistics and Service Depart-
ment are instructing the Navy students
in a specially-designed laboratory con-
taining the first auto-navigator produc-
tion model—including gyro-stabilized
platform, separate navigation console
and digital computer.

missiles and rockets, June 22, 1959

BENDIX EXCLUSIVE FOR JET STARTERS: AN EXTRA ENGINE PAD!

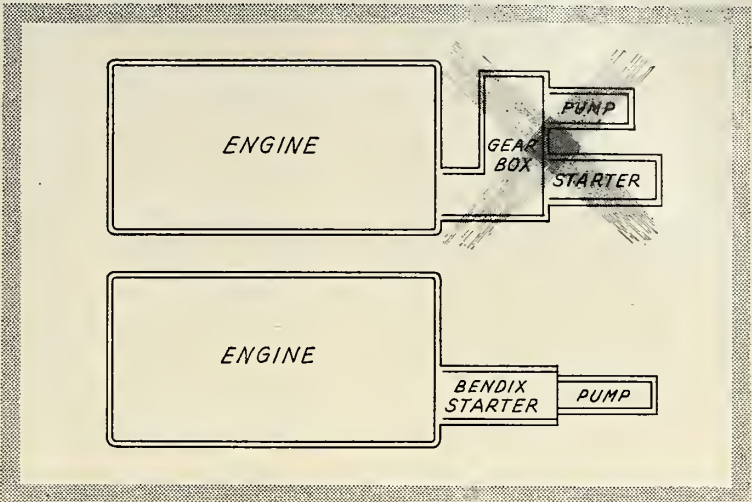

NO GEAR BOX is needed with the Bendix Utica air turbine starter with accessory drive pad. Compare standard engine arrangement, above, with Bendix Utica mounting, below.


For the first time, Bendix Utica offers an air turbine starter and accessory drive unit, featuring an integral mounting pad for continuous drive of a pump, generator, compressor or similar accessory. Developed by Bendix engineers, the new unit minimizes accessory mounting problems, eliminates the need for a gear box and provides efficient operation with reduced weight and better economy. You get continuous accessory drive during engine operation—and the design can be readily modified to cover a wide range of engine requirements.

Engine starting with this unit is automatic and cockpit-actuated. The engine is carried through light-off by the starter to the established cut-out speed. Then air flow to the turbine is automatically cut off and the unit's starter section coasts to rest, while the engine continues to drive the mounted accessory through the drive shaft and accessory pad gearing.

The starter is adaptable to high-temperature cross-bleed starting for multi-engine installations. It conforms to military specifications and has a minimum service life of 600 starts and 500 operational hours between overhauls. Safe operation is assured by self-limiting runaway speed and reverse

overload release mechanism. It's easy to install and mount and provides reliable operation at extreme ambient temperatures.

ADDRESS ALL INQUIRIES TO:
Bendix Utica, 211 Seward Ave., Utica, N. Y.
West Coast: 117 E. Providencia, Burbank, Calif.
Canada: Aviation Electric Ltd., 200 Laurentien Blvd.,
Montreal, Que.
Export Sales and Service
Bendix International, 205 E. 42nd St., New York 17, N. Y.

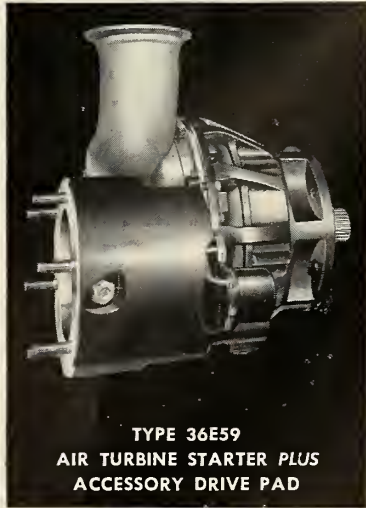

**TYPE 36E59
AIR TURBINE STARTER PLUS
ACCESSORY DRIVE PAD**

Bendix Utica Division

UTICA, NEW YORK



The experts
show you how to
build a rocket safely

THE ROCKET HANDBOOK for AMATEURS

An Illustrated Guide to the Safe
Construction, Testing, and
Launching of Model Rockets

Edited by LT. COL.
CHARLES M. PARKIN, Jr.,
Army Engineer Corps. Fore-
word by WERNHER VON
BRAUN. Written by eleven
contributors professionally en-
gaged in rocket development,
this book—the first of its kind
—gives amateurs of all ages
the basic knowledge essential
for rocket-building. It includes
chapters on organizing a rock-
et club, satellite orbit geome-
try, human factors in space
flight, safety precautions, solid
and liquid propellants, design,
fuel pumps, cryogenics, test in-
struments and the building of
a safe rocket. Thoroughly il-
lustrated. The editor is Presi-
dent, National Capital Section,
American Rocket Society.
\$5.95 at your bookstore or
order from

THE JOHN DAY COMPANY
Sales Office: 210 Madison Av.
New York 16, New York

Now Available

NUCLEAR EXPLOSIONS IN SPACE

by Prof. S. Fred Singer

the story behind

Project ARGUS

Reprints of this exclusive M/R report
are now available due to repeated re-
quests.

A series of four illustrated articles
combined, this important M/R special
contains scientific explanations of:

- * project ARGUS
- * creation of an artificial particle belt
- * effect on manned space vehicles and
nuclear warheads
- * effects on radar and long-range com-
munications
- * scientific techniques for detecting
such explosions

50 cents per copy
(bulk rates on request from publisher)

missiles and rockets

1001 Vermont Ave., N.W.
Washington, D.C.

missile business . . .

By DONALD E. PERRY

What's best when you want to pick up . . .

more defense business? Acquire a new company—and take a lot of bad features along with the good capabilities you want, or go after competent personnel and build from within your existing organization? There's a lot of merit in the latter approach, and one company that is going all-out for it is the Crosley Division of Avco Corp., which is attempting to up its military business from a present \$80 million annually to \$125 million.

Avco-Crosley has a good position in the areas . . .

it went into earlier: some 75 to 80% of the business in command receivers, good prospects in fuzing and arming—Titan work now and a new NOL contract for *Polaris*—and a healthy outlook for honeycomb structures both in aircraft and missiles.

An old-timer in Falcon structures . . .

and complete radar systems (both looking good), Avco-Crosley under President F. C. Reith months ago started broadening. "We determined," Reith said, "to get competent technical and professional people in new areas which we had not been in before." Targets: sonar, electronic checkout equipment, human engineering, infrared (surveillance, ICBM detection, mapping).

But how to approach it . . .

was another thing. Reith decided almost entirely on going out and getting the personnel. "Not that we have anything against acquisition; we haven't. We're still looking in the infrared field but we are being selective," he says.

Crosley's personnel build-up is reflected . . .

by nearly a 30% increase in its professional staff, giving the company what Reith considers a strong capability for new business. In key spots are many newcomers brought in from other concerns usually for one reason: a broad background in particular areas where Crosley wants to expand its business scope.

To cite just a few . . .

Dr. E. A. Steinhoff (formerly with Aerophysics Development Corp.), and former member of von Braun's Peenemunde team, heads up a new missiles department. He is considered one of the world's foremost authorities on missile system guidance and control. Marine Electronics has Dr. H. W. Marsh (formerly with Westinghouse in missile ground-handling equipment), who has a broad background in the quantitative nature of environment and signal processing for sonar systems.

Still another former Westinghouse specialist in electronic and electromechanical systems R&D—Dr. F. E. Lowance—serves as Crosley's vice president of engineering. Dr. John W. Odle, director of Crosley's Advanced Development Department, came from the University of Michigan with a varied background in mathematics and systems and analytical studies.

Brought in from Control Instrument Co. where he was Controller and director of Purchasing was R. B. Marston, Crosley's engineering controller.

Dr. Frank B. Brown, Crosley's Reliability Director, came from Melpar, where he directed a study program for integration of SAGE into Air Traffic Control. Coming from Martin's *Titan* program was J. C. Elms, now Crosley Electronics Engineering vice-president, directing Crosley's weapon systems R&D.

So you can take your choice . . .

Buy up companies and perhaps get too much deadwood, or be selective and pick your own. Avco-Crosley thinks it has the best approach.

Thiokol Plans Clarified

To the Editor:

We are afraid that the West Coast industry column in the May 18 issue of Missiles and Rockets may create considerable misunderstanding among our customers regarding our intentions toward systems contracting.

Thiokol Chemical Corporation has no intention of becoming a prime systems contractor based upon the fact that our customers are such contractors and it is believed that they would not look favorably on purchasing engines from a competitor.

The history of engine development and production activities in this country has demonstrated the validity of separating such activities from airframe development and production. We believe that the validity of this principle applies equally to the aircraft and air-breathing engine field and the field of rocket engine development and production for missiles. The cost of development and production of a rocket power plant is normally a small portion of the cost of a missile system. A single missile system should have to support the cost of a strong technological team engaged in engine development.

We believe that the current tendency to combine a wide range of technologies

into a single organization can only serve to weaken the technological strength of many of the groups engaged in sub-system development. The current tendency to integrate rocket development technology with prime systems capability could have a very debilitating effect upon the whole industry.

It will remain the policy of Thiokol Chemical Corporation to serve as an engine development and production contractor. We hope to be able to serve many prime systems contractors in such a role. We have no intention whatsoever of scaring off our customers by going into competition with them.

H. W. Ritchey
Vice-President
Thiokol Chemical Corp.
Huntsville, Ala.

Trolley Breakdown?

To the Editor:

Regarding the "Moon Trolley" letter in the June 8 issue of M/R.

The two fellows from Picatinny Arsenal could have saved themselves a lot of embarrassment by a few simple calculations.

The strongest materials today would be torn by their own weight if made into a cylindrical cable only 20 miles in

length. Even at an altitude of 4000 miles, the longest cable that could be hung would be 80 miles; at 12,000 miles: 320 miles long. A tapered cable could be made approximately 1000 miles long at the 12,000-mile altitude. However, the 1000-mile cable would be of little value toward spanning the 239,000 miles to the moon.

Sorry fellows, but the "moon trolley" must be given up as well as that strong brand of coffee you have been drinking.

R. S. Ronay
Aero. Engineer
Douglas Aircraft Co.
Cocoa Beach, Fla.

Our Pleasure

To the Editor:

The U.S. Army Ordnance Guided Missile School Library wishes to thank the Editors of Missiles and Rockets for their most gracious gift of the bound sets of Missiles and Rockets, volumes 1-4, presented 7 May 1959.

These volumes are an invaluable reference addition to our new library. They form a nucleus for research in the field of guided missiles and are much appreciated and used by staff, faculty, and students of the school.

H. M. Thomas, Jr.
Major, Ord Corps.
US Army
Ordnance Guided Missile School
Redstone Arsenal, Ala.

BENDIX SR RACK AND PANEL CONNECTOR


*with outstanding resistance
to vibration*

The Bendix type SR rack and panel electrical connector provides exceptional resistance to vibration. The low engagement force gives it a decided advantage over existing connectors of this type.

Adding to the efficiency of this rack and panel connector is the performance-proven Bendix "clip-type" closed entry socket. Insert patterns are available to mate with existing equipment in the field.

Available in general duty, pressurized or potted types, each with temperature range of -67°F to +257°F.

Here, indeed, is another outstanding Bendix product that should be your first choice in rack and panel connectors.

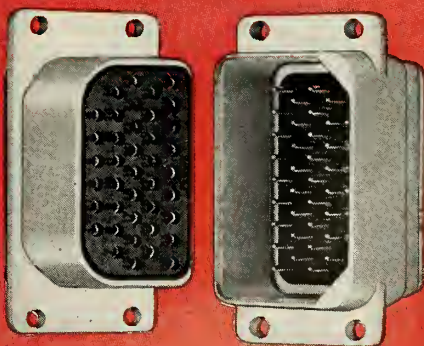

FEATURES:

Resilient Insert • Solid Shell Construction • Low Engagement Forces • Closed Entry Sockets • Positive Contact Alignment Contacts—heavily gold plated Cadmium Plate—clear irridite finish • Easily Pressurized to latest MIL Specifications.

SCINTILLA DIVISION

SIDNEY, NEW YORK



Export Sales and Service: Bendix International Div., 205 E. 42nd St., New York 17, N. Y.
Canadian Affiliates: Aviation Electric Ltd., 200 Laurentien Blvd., Montreal 9, Quebec.

Factory Branch Offices: Burbank, Calif.; Orlando, Florida; Chicago, Illinois; Teaneck, New Jersey; Dallas, Texas; Seattle, Washington; Washington, D. C.

STRENGTH OF CERAMICS AT HIGH TEMPERATURES, U.S. Department of Commerce, National Bureau of Standards, Summary Technical Report.

The strength of aluminum oxide single crystals has recently been studied at the National Bureau of Standards as a function of temperature. Modulus-of-rupture measurements were related to factors affecting crystal strength at temperatures up to 1000°C.

Certain crystal orientation significantly affects crystal strength by giving rise to plastic deformation at stress concentrations. As these stresses are relieved, crystal strength increases.

AN ANALYSIS OF ELECTRON BEAM INTERACTION WITH EMPHASIS ON THE CROSSED FIELD PROBLEM, J. W. Kluver, University of California for WADC, USAF, 86 pp., \$2.25, available from OTS, U.S. Department of Commerce, Washington 25, D.C.

A general method of approach for the approximate solution of the small-signal perturbation of a bounded electron stream surrounded by a periodic structure was developed. With the requirement that energy be conserved, the electron stream is described on the basis of the Maxwell-Boltzmann equations.

The perturbation of dynamic equations is carried out and its effect on a defined boundary of the electron stream discussed.

Beginning with the Lorentz reciprocity theorem in its complex form, the approximate boundary conditions for the rf electric field at an equivalent surface of the periodic structure are derived.

Characteristic waves are found by employing the discontinuity conditions at the beam boundary. A power theorem describing the conversion of rf kinetic energy into electromagnetic energy is also given.

GROWTH OF METAL SINGLE CRYSTALS, U.S. Department of Commerce, National Bureau of Standards, Summary Technical Report.

Equipment has been developed to grow preferentially oriented metal monocrystals in practically any cross-sectional shape. These crystals, having an ordered atomic arrangement, are particularly useful in studying the influence of crystal structure on corrosion.

A pre-selected crystallographic orientation is obtained with a technique known as "seeding," and the desired cross-sectional shape is produced by growing the crystals in a vertical furnace.

MECHANICAL DEGRADATION OF POLYMERS, U.S. Department of Commerce, National Bureau of Standards, Summary Technical Report.

To obtain basic information on me-

chanical degradation of polymers, the National Bureau of Standards has been investigating the effect of mechanical stress on various concentrated polymer solutions. By studying mechanical degradation, the use of polymers which deg excessively under severe conditions be avoided and special polymers will remain intact under such conditions can be developed.

SURVEY OF THE FIELD OF MECHANICAL TRANSLATION OF LANGUAGES, G. Reitwiesner and M. H. Weik, Ballistics Research Laboratories, U.S. Army, 65 pp., available from OTS, U.S. Department of Commerce.

Developments and problems in the field of mechanical translation of languages by means of high-speed electronic computers are analyzed in this Army report.

The information, gleaned from a literature survey and from interviews with workers in the field, covers the mechanical translation activities of government, commercial, and educational institutions in the United States as well as contributions made in Britain and Russia. Includes a bibliography of 175 references.

The subject is described in terms of the two major aspects of machine translation, methodology and equipment. Methodology, the problems of grammatical rules, syntactical analysis, dictionaries, flow charts, and programs are discussed. Information on equipment deals with character sensing equipment, information storage devices, primary methods, and arithmetic or processing organs.

A number of general purpose electronic computing systems are discussed along with the special purpose computer of the University of Washington and the Air Force's Mechanical Translator. 1. Predictions are made concerning future developments and the time necessary before working programs in the machine translation field can be expected.

EXPERIMENTAL ALTITUDE PERFORMANCE OF JP-4 FUEL AND LIQUID-OXYGEN ROCKET ENGINE WITH AN AREA RATIO OF 48, Anthony Fortini, Charles D. Heffner, and Vearl N. Huff, May, 1959, 27 pp., (NACA MEMORANDUM 5-14-59E).

The performance of a rocket engine having a nozzle area ratio of 48 was experimentally measured at four altitudes and corrected to vacuum conditions. A comparison of experimental performance with that of a sea-level engine having an area ratio of 5.5 was made.

The propellant combination JP-4 and liquid oxygen was used for both engines. The chamber pressure was 600 lb./sq. in. abs. Altitudes were obtained by an ejector system utilizing rocket exhaust gas as the pumping medium.

Results indicate the large-area engine gives a specific impulse of 110 lb.-sec./lb. at vacuum conditions. At sea level, the large-area-ratio engine countered flow separation within the nozzle and the specific impulse was 100 lb.-sec./lb. The results also include measured heat-transfer rates and heat loads on the engine.

This is not and is under no circumstances to be construed as an offer to sell, or as an offer to buy, or as a solicitation of an offer to buy, any of the securities herein mentioned. The offering is made only by the Prospectus.

New Issue

June 9, 1959

1,800,000 Shares

Electronics Capital Corporation

Common Stock

Price \$10 per share

Copies of the Prospectus may be obtained in any state only from such dealers participating in this issue, including the undersigned, as may legally offer these Securities under the securities laws of such State.

Hayden, Stone & Co.

Paine, Webber, Jackson & Curtis

Dempsey-Tegeler & Co.

Goodbody & Co.

J. A. Hogle & Co.

E. F. Hutton & Company

Piper, Jaffray & Hopwood

Daniel Reeves & Co.

Walston & Co., Inc.

propulsion engineering

Basic studies on plastics . . .

at Brooklyn Polytechnic Institute will give propulsion engineers more data on solid propellants. Brooklyn Poly will study cracking in rigid plastic materials under a \$28,325 Wright Air Development Center contract. Far from being "library research" on a theoretical level, the project is primarily concerned with cracking under actual environmental stresses. Although the materials to be studied first are not fuels or binders, the information they yield will be applicable to polysulphide rubber and polyurethane. Brooklyn poly researchers will first look at nylon, polystyrene and irradiated polyethylene.

Propellant grains may change radically . . .

if the study yields new information about cracking, and many chemists and engineers expect it will come up with new findings, since very little has been done along this line. Grain sizes, configurations, storage requirements and applications are controlled by cracking characteristics of plastic material fuels and binders.

You can learn solid state chemistry . . .

or at least the rudiments of the solid state chemistry you have to have in your work, in a quick, easy way—thanks to a new Department of Commerce ten-year study of Navy activity in the field. Commerce's Office of Technical Services reviews 75 Office of Naval Research Reports in solid-state work in "Solid State Chemistry: Final Report on the Activity During the Period of This Contract 1948-1957," Technical Report No. 76, \$1.00. W. A. Weyl and E. C. Marboe break down a discussion of the properties of matter into five easy-to-follow subheadings, and then cover six classical areas.

The ortho-para hydrogen conversion . . .

which has been discussed in this column several times as a factor moving liquid hydrogen closer to practical consideration as a missile fuel, is used as a brief example of quantum mechanics in the study. Weyl and Marboe discuss the K. Fajans concept of chemical binding forces at length: "Quantum mechanics deviates from the classical approaches to chemistry by not using atoms or ions as the ultimate building units, but by referring to the interaction of nuclei and electrons . . ."

For missilemen the major points . . .

outlined in the report are:

- (1) Building unit properties change with their environment; concept of a "constant chemical bond" can be misleading.
- (2) Any disturbance of a crystal lattice creates a "depth action" on the chemical binding forces.
- (3) The first principle is establishment of electro-neutrality in the smallest volume possible; the second is the need of screening of positive cores, which accounts for most elements being solids at room temperatures.
- (4) The rate of many chemical reactions is determined by penetration of a proton into a polarizable anion; anion polarizability varies with thermal vibrations of surrounding ions.

Properties of oxide surfaces . . .

is one study covered by the final report. Others in the list of 76 papers which contribute to the review include:

Catalytic activity of gases on decomposition of hydrogen peroxide; decomposition of hydrogen peroxide by lead fluoride; catalytic activity of semiconductors; effect of foreign atoms on electronic properties of crystals; change of a P-type semiconductor into a N-type semiconductor by vapor treatment; mechanism of recrystallization and sintering; differential thermal analysis of metal hydroxides; application of the polarization theory to ceramic problems; kinetics of reactions between oxides in the solid state; structure of the high-temperature modification of lithium sulphate.

Explosive Ordnance

PRESSURE CARTRIDGES • INITIATORS • IGNITERS

FOR MISSILES, AIRCRAFT, GROUND SUPPORT

PRESSURE CARTRIDGES

produce controlled pressure gas for device operation • stage release and separation • thrust reversal and termination • operation of linear and torque actuators.

INITIATORS

SQUIBS, PRIMERS, DETONATORS. far all explosive and pyrotechnic initiation.

IGNITERS

to ignite solid or liquid propellant motors.

ELECTRIC SQUIBS

to produce hot flame and gas pressure for ignition of pyrotechnics or operation of devices.

Physical Chemists, Engineering Physicists and Chemical Engineers are invited to submit resumes to Frank LaHue, Vice-President Engineering for position openings in all phases of explosive ordnance.



McCormick Selph Associates

HOLLISTER AIRPORT, HOLLISTER, CALIFORNIA

Reach the heart of the missile market throughout the entire year.

missiles and rockets.

3rd ANNUAL engineering progress issue

featuring the Guided Missile Encyclopedia


JULY 20, 1959

Your guarantee to high readership and constant reference . . . in the \$7 billion missile market.

Here is the most exciting and popular issue of the year. Authoritative articles by recognized experts—from Astrometry to Ion Propulsion—PLUS the new and expanded Guided Missile Encyclopedia. Now you can reach the

market in depth and quality as never before. Write, call or wire your *missile and rockets* representative today, and find out how you can put your sales message where it will reach the heart of the missile market throughout the entire year.

NEW YORK CITY: 17 East 48th Street PLaza 3-1100 • DETROIT: 201 Stephenson Bldg. TRinity 5-2555 • CHICAGO: 139 N. Clark Street CEntral 6-5804 • LOS ANGELES: 8929 Wilshire Blvd. OLeander 5-9161 • MIAMI: 208 Almeria Avenue HHighland 4-8326 • TORONTO: 12 Richmond Street E. EMpire 4-2001 • LONDON: 28 Bruton Street GRosvenor 835 • PARIS: 11 Rue Condorcet TRu 15-39 • GENEVA: 10 Rue Grenus 34 66 73



missiles and rockets

AN AMERICAN AVIATION PUBLICATION

1001 VERMONT AVENUE, N. W., WASHINGTON 5, D. C.

John H. Rubel, 39, on leave from the Hughes Aircraft Co., where he was director of airborne systems laboratories, has been named assistant director for strategic weapons in the DOD office of research and engineering headed by Dr. Herbert F. York.

An electrical engineering graduate of California Institute of Technology, Rubel has 16 years' experience in the electronics industry. In 1946, he joined the Hughes company, where he contributed to work on automatic celestial navigation, the *Falcon* series of air-to-air guided missiles and airborne armament control systems and in Air Force all-weather jet interceptors.

Dr. F. Kenneth Brasted, president of University of Dallas since 1955, has been named administrative director of the Central Research Laboratory. Dr. Brasted holds a bachelor of arts degree from the University of Florida, an M.A. degree from Columbia University, and a Ph.D. from New York University. Before coming to Dallas, he served seven years as a member of the coordinating committee and director of the educational department, National Association of Manufacturers.

Space Technology Laboratories, Inc., has appointed **Walter B. Brewer** manager of its airborne systems and test department, *Atlas* Program Office. Brewer had been an associate manager of the airborne systems and test department since joining in March of this year.

A new hypersonic tunnel department at Cornell Aeronautical Laboratory, Buffalo, will be headed by **King D. Bird**, formerly head of the transonic tunnel department. **James F. Martin** has been named assistant head of the new department.

John P. Andes has been named head of the transonic tunnel department and **W. Cotter**, assistant department head. Andes was formerly assistant department head of transonic tunnel.

Rocket Power, Inc., a subsidiary of the Gabriel Co., has named **A. Lincoln Pittinger** vice president for planning and marketing. Pittinger, closely linked with the rocket and missile industry since 1943, was commander of the first Navy rocket plant at China Lake. As civilian in charge of product and production engineering at NOTS through 1951, he helped

place into production the Navy 2.75-inch *Mighty Mouse* aircraft rocket and many other advanced weapons. Called to Europe in 1952 by the NATO countries, he set up rocket facilities in Belgium and Greece to support the free world arsenal. Pittinger also has served as director of R&D for the Cooper Development Corp., and was responsible for major advances in upper-atmosphere sounding rockets. He resumed private practice in late 1957, and had been very active in the development of high-altitude meteorological sounding rockets prior to joining Rocket Power, Inc.

Rocket Power, Inc., also has appointed **John K. Elder** vice president of its applied research and testing laboratories. Following graduation from the California Institute of Technology, Elder was employed by the Aerojet-General Corp. where he engaged in solid propellant research and development activities for four years. He joined Grand Central Rocket in 1955.

William H. Clark is the new general superintendent of Allen B. Du Mont Laboratories, Inc. Clark will be responsible for the company's plant and office facilities in Clifton, Passaic, and East Paterson, N.J. He succeeds **Walter H. Husselrath**, who died on May 25.

At the Norden Division, United Aircraft Corp., **Samuel B. Sherwin** has been appointed manager of the Ketay department in Commack, L.I., and **Wladimir Reichel** engineering manager. A native New Yorker, Sherwin has been manager of the overhaul and repair department of UA's Hamilton Standard Division at Windsor Locks, Conn. Reichel is Norden's basic design chief and a pioneer in instrument miniaturization. Born in St. Petersburg, Russia, he has been in the United States since 1923 and holds numerous patents on servo components, gyro and navigational instruments. He directed important work on inertial navigational system development.

Dr. Robert W. Perry has been named head of Republic Aviation's re-entry simulation laboratory in the company's new \$14 million Astronautical Center. **Dr. Samuel Korman** will head the Materials Development Laboratory to create new alloys and synthetics capable of withstanding the rigors of outer space. Associated with Dr. Korman are **Dr. Robert P.**

Bastian and **Dr. Stanley Zirinsky**, who have been appointed chief chemist and chief metallurgist, respectively. Perry was formerly manager of the research branch, gas dynamics facility, at the Arnold Engineering Development Center, and is a member of NASA's Advisory Committee on Fluid Dynamics. Korman was formerly a consultant to the Atomic Energy Commission, the Air Force and several American industrial firms. Before joining Republic, Bastian was associated with Sylvania Electric Products, where he was an engineering specialist in analytical and inorganic chemistry, and Zirinsky was previously staff consultant to the Missiles and Space Vehicles Division of the General Electric Co.

Woodman Perine, president of Vitro Engineering Co., has been named vice president of Vitro Corp. of America. **James C. Tourek**, chief project manager, was named acting general manager of Vitro Engineering, replacing Perine. In his new position, Perine will direct the activities of Vitro's Technical Services and Products Group which includes Vitro Engineering; the Refinery Engineering Co., Tulsa, Okla.; Nems-Clarke Co., Silver Spring, Md.; Thieblot Aircraft Company, Martinsburg, W.Va., and Vitro Laboratories, Silver Spring, Md.

Dr. A. W. Wortham, manager of the Quality Assurance Department, Semiconductor-Components division of Texas Instruments Incorporated, has been elected executive director of the American Society for Quality Control. Dr. Wortham has jurisdiction over District 14 of the ASQC, including Texas, Oklahoma, New Mexico, Louisiana and Mexico.


Shareholders of Lear, Inc. recently elected six new directors and re-elected eight to the board. The new directors are: **James L. Anast**, who became president on April 9, 1959; **Roy J. Benecchi**, group vice president; **Barney M. Giles**, assistant to the president; **Philip E. Golde**, senior vice president, secretary and general counsel; **K. Robert Hahn**, executive vice president, and **Andrew F. Haiduck**, group vice president.

Re-elected were **William P. Lear**, chairman of the board, and **Richard M. Mock**, chairman of the executive committee; and the following non-employee directors: **Harold R. Boyer** of General Motors Corp., **A. G. Handschumacher** of Rheem Manufacturing Co., **Kenneth MacGrath** of High Standard Manufacturing Corp., **Richard W. Millar** of William R. Staats & Co., **Clarence J. Reese** of Continental Motors Corp. and **Russell A. Stevenson**, University of Michigan.

Jay W. Schnackel has been appointed vice president of Remington Rand Division of Sperry Rand Corp. in an overall staff position in the company's Univac-Tabulating Division. Schnackel has been vice president for manufacturing services of International Business Machines Corp. since 1956.



RUBEL



ELDER



SHERWIN



PITTINGER

contract awards

ARPA

\$600,000—RCA, for studying the feasibility of tracking and intercepting enemy space satellites.

MISCELLANEOUS

\$193,000—Avion Div. of ACF Industries, Inc., Paramus, N.J., for production of radar beacons used in test firings to extend the precision of tracking range of ground radar. (Contract awarded by the United Kingdom Treasury and Supply Delegation in the U.S.)

NASA

Grumman Aircraft Engineering Corp., has been awarded a contract to conduct studies concerning the search and recovery operations of Project Mercury. (Amount not disclosed.)

\$100,000—Applied Science Corp. of Princeton, for airborne statistical telemetering equipment for Project Mercury. (Subcontract from McDonnell Aircraft Corp.).

NAVY

Stavid Engineering, Inc., Plainfield, N.J., for initiation of a new, advanced, lightweight shipboard radar, designated AN/SPS-40. (Amount not disclosed.)

\$37,750,000—Collins Radio Co., Cedar Rapids, Iowa, for production of electronic counter-measures receivers to be installed on both surface and undersea craft.

\$140,050—Cooper Development Corp., Monrovia, Calif., for development and fabrication of flight instrumentation assemblies.

\$125,000—Ralph T. Viola, Oxnard, Calif., for site preparation for Cotar acquisition system at Point Mugu, Calif.

\$100,000—Magnetic Research Corp., Hawthorne, Calif., for production of 28 volt, 60 cps ground power supplies for use on the *Talos* missile.

\$92,000—Les Kelley, Belmont, Calif., for instrumentation site, Point Pillar, Princeton, Calif., for naval missile center, Point Mugu, Calif.

\$87,000—NRC Equipment Corp., Newton Highlands, Mass., for design, development and production of ultra-high-vacuum gauges for satellite instrumentation.

\$49,929—Raymond Engineering Laboratory, Inc., Middletown, Conn., for design, manufacture and evaluation of rocketborne ionosphere antennas, housing units and antenna opening mechanisms.

\$34,800—General Dynamics Corp., Liquid Carbonic Div., Los Angeles, for liquid bulk oxygen.

\$32,688—Broderick & Bascom Rope Co., St. Louis, for wire rope, 6x19, preformed, high-strength, uncoated for aircraft launching and arresting.

\$26,390—Century Tool Co., Palmyra, N.Y., for organizational maintenance and assembly tool kit for the *Nike*.

AIR FORCE

Hermes Electronics Co., Cambridge, Mass., has been awarded a contract of more than \$1,000,000 dollars for timing equipment for the IBM Bombing-Navigation Missile Guidance System to be used in the B-70 (subcontract from International Business Machines Corp.).

Westinghouse Electric Corp., Air Arm Div., Baltimore, has been awarded a "multi-million" dollar contract for development and building of a defensive system for the B-70 (subcontract from North American Aviation).

\$47,000—Sperry Gyroscope Co., Great Neck, N.Y., for development and production of high-powered air search radar systems.

\$3,900,000—Ryan Aeronautical Co., for Firebee jet targets to be used to simulate "enemy" attacks at Tyndall AFB, Fla.

\$3,600,000—Lear, Inc., Instrument Div., Grand Rapids, Mich., for coordinate converter systems for the early version of the Boeing *Bomarc IM-99*. (Total program now exceeds \$20,000,000.)

\$2,712,132—Convair Div. of General Dynamics Corp., for B-58 mobile training units.

\$2,300,000—International Telephone & Telegraph Corp., San Fernando, for 36 multi-

ple voltage supply systems for the B-58 (subcontract from Convair Div. of General Dynamics).

\$1,843,944—General Precision Laboratory, Inc., for navigation equipment components.

\$1,706,469—Convair Div. of General Dynamics Corp., San Diego, for installation of new Azusa Mark II missile tracking equipment at Cape Canaveral.

\$1,500,000—Electronic Associates, Inc., Long Branch, N.J., for range instrumentation equipment for the Eglin Gulf Test Range (subcontract from IT&T).

\$951,374—Convair Astronautics Div. of General Dynamics Corp., San Diego, for design, development and fabrication of a cosine rate system for the Azusa Mk II and other related items.

\$819,400—Diversified Builders, Cocoa, Fla., for construction of a blockhouse for the *Saturn* missile at Cape Canaveral.

\$194,692—Conoga Div. of Underwood Corp., Ft. Walton Beach, Fla., for seven airborne timing systems to be used in telemetry aircraft of the AFMTC's 6550th Operations Squadron.

\$182,500—Raytheon Mfg. Co., Missile Systems Div., Waltham, Mass., for 13 Rayspan spectrum analyzers.

\$153,000—Model Engineering & Mfg., Inc., Huntington, Ind., for signal generators to support various aircraft and missiles.

\$100,000—Ratigan Electronics, Inc., Glendale, Calif., for components to be used in the *Falcon* (subcontract from Hughes Aircraft Co., Tucson Div.).

\$86,971—Graflex, Inc., Rochester, N.Y. for 231 speed graphic camera sets.

\$54,717—Motorola, Inc., Phoenix, Ariz., for sub-miniature frequency modulated UHF radio receiver set used to receive and decode range safety command signals during missile flight operations.

\$43,930—Cooper Development Corp., Monrovia, Calif., for *Aspen* rocket vehicles, less *Nike* booster and *Nike* fins, engineering field service and firing circuit test set.

\$37,955—University of Illinois, for laboratory investigation of SAGE operator performance factors contributing to operator fatigue.

\$36,000—Minneapolis-Honeywell Regulator Co., Aeronautical Div., Minneapolis, for liquid oxygen amplifiers for various aircraft.

\$35,000—Consolidated Avionics Corp., Westbury, N.Y., for a strain gage data reduction system (subcontract from Hamilton Standard Div., United Aircraft Corp.).

ARMY

BJ Electronics, Borg-Warner Corp., Santa Ana, Calif., for GMD-1 transportable ground tracking and data recording equipment (substantial addition to a \$500,000 initial contract).

\$3,172,929—Douglas Aircraft Co. Inc., Santa Monica, for launching area items.

\$2,798,219—Blount Brothers Construction Co., Montgomery, Ala., for construction of *Bomarc* facilities.

\$2,390,567—Jet Propulsion Laboratory, Calif. Institute of Technology, for continued research and development of the *Sergeant*.

\$981,000—Sperry Utah Engineering Laboratory, Salt Lake City, for *Sergeant* missile repair parts.

\$900,000—The Firestone Tire & Rubber Co., Los Angeles, for the *Corporal* missile.

\$390,000—Rheem Manufacturing Co., Downey, Calif., for research and development.

\$363,961—Westwood Construction Co., Denver, for construction of liquid oxygen facility at F. E. Warren AFB, Cheyenne, Wyo.

\$260,483—Gilfillan Brothers, Inc., Los Angeles, for engineering services.

\$150,879—Douglas Aircraft Co., Inc., Santa Monica, for *Honest John* program.

\$140,000—The Rust Engineering Co., Pittsburgh, Pa., for architect-engineer services in connection with design of Third Increment *Missilemaster* facilities.

\$122,599—Murray Construction Co., Battle Creek, Mich., for building rehabilitation for SAGE support facility at Fort Custer AFB.

\$100,000—Paul Monroe Co., Bell Gard Calif., for construction of specialized hydraulic equipment for actuating the d of "half-hard" *Atlas* sites at Fair AFB.

\$85,000—Pennsylvania State University, University Park, Pa., for research and development on the determination of electron densities of the ionosphere.

\$84,240—Motordyne, Inc., Monrovia, Cal. for motor generators.

\$75,000—Ryan Aeronautical Co., San Diego, for miscellaneous support items.

\$70,000—California Institute of Technology, Pasadena, for research and development.

\$68,577—Gilfillan Brothers, Inc., Los Angeles, for *Corporal* missile repair parts.

\$64,481—The Andy Electric Company, Andalusia, Ala., for the installation of 500 KW engine generators at Cape Canaveral, Fla.

\$60,000—University of Florida, Gainesville, for basic research.

\$57,527—Aircraft Armaments Inc., Cockeville, Md., for design, fabrication and delivery of a rocket sled.

\$56,279—Telemetering Corp. of America, Sepulveda, for technical services.

\$54,161—Nortronics Div., Northrop Corp., Anaheim, Calif., for research and development.

\$50,359—Douglas Aircraft Co., Charleston, N.C. for *Nike* spare parts and components.

\$49,850—Spectralab Instruments, Monrovia, Calif., for telemetry systems.

\$39,800—Servomechanisms, Inc., Hawthorne, Calif., for computer systems.

\$35,000—North American Aviation, Rockledge Div., for design and development.

\$34,042—Interstate Electronics Corp., Anaheim, Calif., for supplies.

\$34,000—Murice H. Connel & Associates, Miami, Fla., for architect-engineer services for design of *Saturn* missile structure at Patrick AFB, Fla.

\$31,911—Motorola, Inc., Phoenix, for telemetry sets.

\$30,800—Thiokol Chemical Corp., Elmwood, Md., for motor, recruit and solid propellants.

\$25,686—Ryan Aeronautical Co., San Diego, for target missile flight service program.

\$16,636—Western Electric Co., Inc., New York, for *Nike* spare parts and components.

BIDS

The following bids were made public: Ogean Air Materiel Area, Hill AFB, Utah. Att: Directorate of Procurement and Production.—Removal and installation of antenna supporting structures at McCord Air Force Site adjacent to McCord Air Force Wash.—Job—IFB 42-600-59-336B—Bid opening 22 June '59. If reply necessary for OOPFCS-2.

U.S. Army Engineer District, Sacramento Corps of Engineers, Wright Bldg., Sacramento, Calif.—Radar tower, FPS-7, Tonopah AF Station, Tonopah, Nev.—IFB Eng. 04 167 59 67B. Bid opening June '59.

Procurement Office, Patrick Air Force Base, Fla.—Installation of fire protection emergency shower facilities for laundry pads 5, 6 and 26A & B, Cape Canaveral Missile Test Annex, Fla.—Job—IFB 606-259B. Bid opening 29 June '59.

U.S. Army Engineer District, Los Angeles Corps of Engineers, 751 So. Figueroa St., Los Angeles 17, Calif. Construction final increment of a technical building complete, including appurtenant unit and site improvements at Army Electric Proving Ground, Ft. Huachuca, Ariz.—IFB Eng. 04-353-59-95. Bid opening June '59.

Purchasing and Contracting Branch, Fort S-5333, Fort George G. Meade, Md.—Alterations and Improvements to and drainage at *Nike* site 25, 26, 30, 42.—Job—IFB 18-102-59-98. Bid opening 24 June '59.

U.S. Naval Air Station, Oceana, Va. Beach, Va. Air condition guided support bldg. No. 920 at Naval Air Station, Oceana, Va.—Job—IFB NBY. Bid opening 25 June '59.

missiles and rockets, June 22, 1959



ENGINEERS • SCIENTISTS

General Electric's Heavy Military Electronics Dept.

AWARDED CONTRACT FOR

Systems Integration, Engineering, and Management of...

AIR WEAPONS CONTROL SYSTEM 212L

A universal electronic control system to meet the vast problem of Air Defense outside of the Continental United States

Systems-oriented engineers and scientists will appreciate the broadband technical challenge of the Air Weapons Control System 212L. There are important openings for men who are experienced in:

WEAPONS SYSTEMS ANALYSIS • MATHEMATICAL ANALYSIS OF ENGINEERING PROBLEMS • COMPUTER PROGRAMMING • MILITARY COMMUNICATION SYSTEMS • RADAR SYSTEMS • WEAPONS CONTROL SYSTEMS • ELECTRONIC CIRCUITRY • INDUSTRIAL & MILITARY PSYCHOLOGY.

● Working in close cooperation with the USAF, it is Heavy Military's responsibility to integrate all subsystems—data acquisition, communications, data processing and display—plus various defensive weapons into a well coordinated and efficient operating system.

VERSATILE AIR CONTROL APPLICATIONS The revolutionary 212L can be used to defend a single airfield, or, by linking control sites together, it could be used in a limited action to provide air control for an area the size of Alaska. Similarly, by linking the capabilities of countries together, a system could be provided for the air control of an en-

tire continent. Designed for both fixed and mobile applications, the 212L will be used primarily outside the U. S. since the SAGE system is used for the defense of this country.

HMED IS ALSO DESIGNING THE "HEART" OF THE SYSTEM

In addition to its prime mission of providing systems management, HMED will design, develop and produce the data processing and display subsystem which is the "heart" of the 212L. Capable of rapidly and automatically detecting and tracking air targets, the subsystem operates without human assistance, except under unusual circumstances.

OTHER FAR-RANGING PROGRAMS AT HEAVY MILITARY

At the present time additional far-ranging programs are being pursued in diverse and important areas at HMED:

- Fixed & Mobile Radar
- Shipborne Radar
- Underwater Detection Systems
- Missile Guidance
- Data Handling Systems
- Communications

Individuals with experience in systems analysis or specific equipment design in the areas listed above are invited to forward their resume in complete confidence to Mr. George Callender, Div. 73-WY.

HEAVY MILITARY ELECTRONICS DEPARTMENT
GENERAL  **ELECTRIC**
 COURT STREET SYRACUSE, N. Y.

JUNE

American Institute of Electrical Engineers, Air Transportation Conference, Olympic Hotel, Seattle, June 24-26.

Nuclear Industry Division, Instrument Society of America, Second National Symposium, Idaho Falls, Idaho, June 24-26.

Institute of Radio Engineers' Professional Group on Military Electronics, Third National Convention on Military Electronics, Sheraton Park Hotel, Washington, D.C., June 29-July 1.

Pennsylvania State University, Summer Seminar on Plastics—Its Mechanical Properties, Design and Applications, University Park, Pa., June 29-July 3.

JULY

Tenth Annual Basic Statistical Quality Institute, University of Connecticut, Storrs, July 12-24.

Radio Technical Commission for Aeronautics and Los Angeles Section of the Institute of Radio Engineers, Third Biennial Joint Meeting, Ambassador Hotel, Los Angeles, July 16-17.

Second Annual Institute on Missile Technology, Chief of Research and Development, U.S. Army, University of Connecticut, Storrs, July 26-Aug. 7.

The Denver Research Institute of the University of Denver, 6th Annual Symposium on Computers and Data Processing, Stanley Hotel, Estes Park, Colo., July 30-31.

AUGUST

Institution of Investigation of Biological Sciences, sponsored by Air Force Office of Scientific Research—Aeromedical Div., World Health Organization and United Nations Educational Scientific and Cultural Organization, Montevideo, Uruguay, Aug. 2-7.

William Frederick Durand Centennial Conference, Problems of Hypersonic and Space Flight, Stanford University, Stanford, Calif., Aug. 5-7.

Institute of Radio Engineers' Professional Group on Ultrasonics Engineering, First National Ultrasonics Symposium, Stanford University, Stanford, Calif., Aug. 17.

Institute of Radio Engineers, Western Electronic Show & Convention, Cow Palace, San Francisco, Aug. 18-21.

American Rocket Society, Gas Dynamics Symposium, Northwestern University, Evanston, Ill., Aug. 24-26.

International Astronautical Federation, 10th Annual Congress, Church House, Westminster, London, Aug. 31-Sept. 5.

SEPTEMBER

Air Force Office of Scientific Research and General Electric Company's Missile and Space Vehicle Department,

Conference on Physical Chemistry in Aerodynamics and Space Flight, University of Pennsylvania, Philadelphia, Sept. 1-2.

Air Force Association and Panorama; send reservations to AFA Housing Bureau, P. O. Box 1511, Miami Beach, Sept. 3-6.

Standards Engineering Society, Boston Section, Eighth Annual Meeting, Hotel Somerset, Boston, Sept. 21-22.

Instrument Society of America, Conference and Exhibit, Chicago, Sept. 21-25.

Industrial Nuclear Technology Conference, sponsored by Armour Research Foundation of Illinois Institute of Technology, Nucleonics Magazine and Atomic Energy Commission, Morrison Hotel, Chicago, Sept. 22-24.

American Rocket Society, Solid Propellants Conference, Princeton University, Princeton, N.J., Sept. 24-25.

Institute of Radio Engineers, 1959 National Symposium on Telemetering, Civil Auditorium, San Francisco, Sept. 28-30.

OCTOBER

Electronics Industries Association Conference, University of Pennsylvania, University Park, Oct. 6-7.

Stanford Research Institute, First High Temperature Symposium, Asilomar Conference Grounds, Monterey Peninsula, Calif., Oct. 6-9.

National Electronics Conference, sponsored by American Institute of Electrical Engineers, Illinois Institute of Technology, Institute of Radio Engineers, Northwestern University and University of Illinois, Hotel Sherman, Chicago, Oct. 12-14.

Armour Research Foundation, 15th Annual National Conference, Hotel Sherman, Chicago, Oct. 26-30.

Institute of Radio Engineers, Professional Group on Electron Devices, Shoreham Hotel, Washington, D.C., Oct. 29-30.

NOVEMBER

41st National Metal Exposition and Congress, International Amphitheatre, Chicago, Nov. 2-6.

Institute of Aeronautical Sciences, Annual Midwestern Meeting, Lassen Hotel, Wichita, Kan., Nov. 3-4.

Mid-American Electronics Conference, Kansas City, (Mo.) Municipal Auditorium and Hotel Muehlebach, Nov. 3-5.

Fifth International Automation Congress and Exposition, New York Trade Show Bldg., New York City, Nov. 16-20.

The Institute of Radio Engineers, 1959 Northeast Electronics Research and Engineering Meeting, Boston Commonwealth Armory, Boston, Nov. 17-19.


Advertisers' Index

- Aerojet-General Corp., Sub-General Tire & Rubber Co.**
Agency—D'Arcy Adv. Co.
- Bendix Aviation Corp.**
Scintilla Div.
Utica Div.
Agency—MacManus, John & Adams, Inc.
- Boeing Airplane Co.**
Agency—Fletcher Richards, Calkens & Holden, Inc.
- Curtiss-Wright Corp.**
Agency—St. Georges & Keyes, Inc.
- Day John Co., The**
Agency—Denhard & Stewart, Inc.
- Dunham-Bush, Inc.**
Agency—William Schaller Co., Inc.
- Eastern Industries, Inc.**
Agency—Remsen Adv. Agency, Inc.
- Grand Central Rocket Co. 25,**
Agency—Jakobsen Adv. Agency
- Haydon, Stone & Co.**
Agency—Doremus & Company
- Kennametal, Inc.**
Agency—Ketchum, MacLeod & Grove, Inc.
- Kelsey Hayes Corp.**
Agency—Zimmer, Keller & Calvert, Inc.
- Walter Kidde & Co.**
Agency—Cunningham & Walsh, Inc.
- Leach Corp., Relay Div. & Inet Div.**
Agency—Hixson & Jorgensen, Inc.
- Magnavox Co., The, Government & Industrial Division**
Agency—Rothbardt & Haas Adv., Inc.
- McCormick Selph Associates .**
Agency—Aircraft & Missile Consultants
- Minnesota Mining & Mfg. Co., Magnetic Products Div. .**
Agency—MacManus, John & Adams, Inc.
- North American Aviation, Inc. Missile Development Div.**
Agency—Batten, Barton, Durstine & Osborn, Inc.
- Raybestos-Manhattan, Inc. . .**
Agency—Gray & Rogers
- Raytheon Mfg. Co.**
Agency—Donahue & Coe, Inc.
- Ryan Aeronautical Co.**
Agency—Batten, Barton, Durstine & Osborn, Inc.
- Temco Aircraft Corp.**
Agency—Rogers & Smith Adv. Agents
- EMPLOYMENT SECTION**
General Electric Co.
Agency—Deutsch & Shea, Inc.

NO FINER CAPABILITIES



NO FINER CAPABILITIES

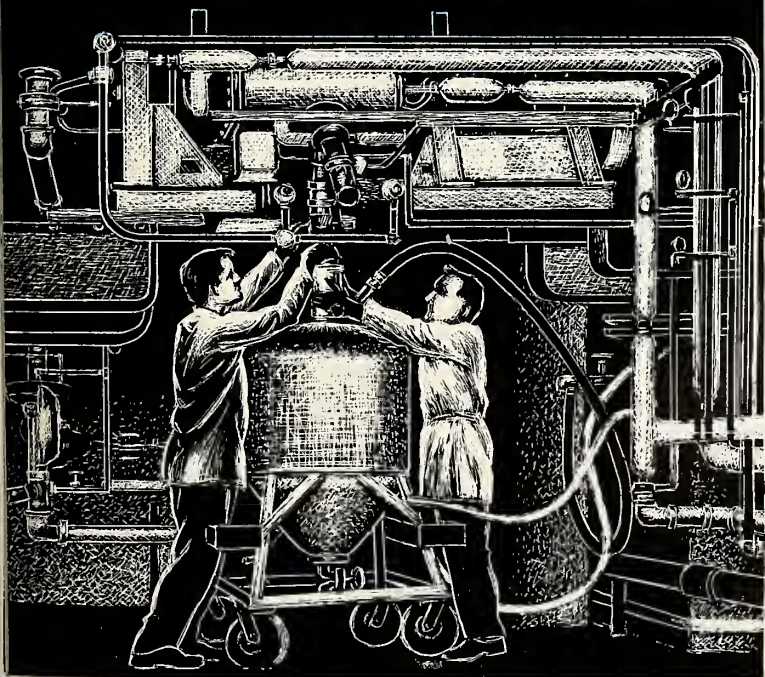

To assure the missile industry of dependable high-energy solid propellants and solid rocket motors, Grand Central Rocket recently added \$2,500,000 in improved engineering, research, manufacturing, and testing facilities. With these improvements and our competent technical staff we offer the finest capabilities.

Grand Central Rocket has in operation the largest solid propellant mixer in America. This mixer has a batch capacity of 350 gallons. In addition, a 50-gallon mixer and 25-gallon mixer are also operating. The maximum capacity of these three ultra modern, remote controlled mixers exceeds 500,000 pounds of solid propellant per month. Immediate plans call for replacing the 25-gallon mixer with a 200-gallon mixer.

These capabilities and capacities are *your* assurance of rapid and satisfactory service.

Write Dept. 2-A for Capabilities and Capacities Brochure.



Grand Central
Rocket Co.

An Affiliate of Tennessee Gas Transmission Company
And Food Machinery and Chemical Corporation

P. O. Box 111
REDLANDS, CALIFORNIA

Telephone: PYramid 3-2211

(If you have the qualifications that a fast-moving space propulsion team needs, contact our Director, Personnel.)



Sharp new eye for navigation

SHARPEST new "eye" for flight is the Ryan C-W Doppler navigator. Based on the advanced development of continuous-wave radar, this system of electronics "intelligence" has been pioneered by Ryan and the U.S. Navy for navigation at all speeds. It tells pilots how to fly to any spot on the globe, with speed and precision, and lets them know exactly where they are at all times.

With the Ryan navigator, military aircraft and jetliners can fly a new "electronic skyway" which provides precise separation between planes and conserves time and fuel. And, because RYANAV systems work right down to ground and sea levels, these advantages accrue at take-off, climb-out, descent and landings, as well as enroute.

The Navy has selected RYANAV for installation in six major types of naval aircraft. They are already in squadron use in the Navy's first all-weather anti-submarine helicopters and are being installed in Army aircraft and helicopters, for low-level "nap of the earth" operations.

Reasons for such wide and versatile use are found in the unique features of RYANAV systems: They are the lightest, simplest, most reliable, most compact of their type. They are setting new standards of accuracy, freedom from adjustment, and ease of maintenance... opening new areas of navigational, guidance, and orientation applications. Ryan electronics engineering assistance is available upon request, to those who wish to explore these areas.

Ryan's rapid growth in electronics is creating new opportunities for engineers and technicians

RYAN BUILDS BETTER

ELECTRONICS DIVISION

Ryan Aeronautical Company, San Diego, Calif.